

Maintenance and Service Guide

HP OmniBook 7 16 inch Laptop Al PC: 16-ay0xxx

HP OmniBook 7 16 inch Laptop Next Gen Al PC: 16-bh0xxx

HP OmniBook 7 16 inch Laptop PC: Model numbers: 17-az0xxx

#### **SUMMARY**

### **Legal information**

© Copyright 2025 HP Development Company, L.P.

Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. Intel, Arc, Core, and Thunderbolt are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. NVIDIA and GeForce RTX are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. USB Type-C, USB-C, and the USB 5 Gbps and USB 10 Gbps port logos are trademarks or registered trademarks of USB Implementers Forum. VESA, DisplayPort, and the DisplayPort logo are trademarks owned by the Video Electronics Standards Association (VESA) in the United States and other countries. Miracast and Wi-Fi are registered trademarks of Wi-Fi Alliance.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

First Edition: April 2025

Document Part Number: P35775-001

#### Product notice

This guide describes features that are common to most products. Some features might not be available on your computer.

Not all features are available in all editions or versions of Windows. Systems might require upgraded and/or separately purchased hardware, drivers, software, or BIOS update to take full advantage of Windows functionality. Windows is automatically updated, which is always enabled. Highspeed internet and Microsoft account required. ISP fees might apply and additional requirements might apply over time for updates. See <a href="http://www.windows.com">http://www.windows.com</a>. If your product ships with Windows in S

Mode: Windows in S Mode works exclusively with apps from the Microsoft Store within Windows. Certain default settings, features, and apps cannot be changed. Some accessories and apps that are compatible with Windows might not work (including some antivirus, PDF writers, driver utilities, and accessibility apps), and performance might vary, even if you switch out of S Mode. If you switch to Windows, you cannot switch back to S Mode. Learn more at Windows.com/SmodeFAQ.

To access the latest user guides, go to <a href="http://www.hp.com/support">http://www.hp.com/support</a>, and follow the instructions to find your product. Then select <a href="Setup & User Guides">Setup & User Guides</a>.

To help us improve this document, please send any suggestions, comments, or errors to mailto:hp.doc.feedback@hp.com. Include the document part number when submitting your feedback.

#### **Software Terms**

By installing, copying, downloading, or otherwise using any software product preinstalled on this computer, you agree to be bound by the terms of the HP End User License Agreement (EULA). If you do not accept these license terms, your sole remedy is to return the entire unused product (hardware and software) within 14 days for a full refund subject to the refund policy of your seller.

For any further information or to request a full refund of the price of the computer, please contact your seller.

## Safety warning notice

Reduce the possibility of heat-related injuries or of overheating the computer by following the practices described.

To reduce the possibility of heat-related injuries or of overheating the computer, do not place the computer directly on your lap or obstruct the computer air vents. Use the computer only on a hard, flat surface. Do not allow another hard surface, such as an adjoining optional printer, or a soft surface, such as pillows or rugs or clothing, to block airflow. Also, do not allow the AC adapter to come into contact with the skin or a soft surface, such as pillows or rugs or clothing, during operation. The computer and the AC adapter provided by HP comply with the user-accessible surface temperature limits defined by applicable safety standards.

### Important notice about Customer Self-Repair parts

Your computer includes Customer Self-Repair parts and parts that should be accessed only by an authorized service provider.

IMPORTANT: See Removal and replacement procedures for Customer Self-Repair parts on page 33 for details.

Accessing parts described in Removal and replacement procedures for authorized service provider parts on page 47 can damage the computer or void your warranty.

# **Table of contents**

roduct description	
2 Getting to know your computer	6
Right side	6
Left side	
Display	8
Low blue light mode (select products only)	
Wake-on-voice (select products only)	
Keyboard area	10
Touchpad settings and components	10
Touchpad settings	
Adjusting touchpad settings	
Turning on the touchpad	
Touchpad components Lights	
Special keys	
Bottom	
Labels	
3 Illustrated parts catalog	16
Computer major components	16
Display assembly subcomponents, touch models	18
Display assembly subcomponents, nontouch models	20
Miscellaneous parts	22
4 Removal and replacement procedures preliminary requirements	24
Tools required	24
Service considerations	24
Plastic parts	24
Cables and connectors	
Drive handling	24
Electrostatic discharge information	
Generating static electricity	
Preventing electrostatic damage to equipment	
Personal grounding methods and equipment	
Grounding the work areaRecommended materials and equipment	
Cleaning your computer	
Enabling HP Easy Clean (select products only)	
Removing dirt and debris from your computer	

Cleaning your computer with a disinfectant	29
Caring for wood veneer (select products only)	30
Packaging and transporting guidelines	30
Accessing support information	30
5 Removal and replacement procedures for Customer Self-Repair parts	33
Component replacement procedures	33
Preparation for disassembly	
Bottom cover	
Battery	36
Removing and reinstalling the same battery	36
Installing a new battery	
Solid-state drive, secondary (select products only)	43
6 Removal and replacement procedures for authorized service provider parts	47
Component replacement procedures	47
Solid-state drive, primary	47
Memory modules (select products only)	
WLAN module	
Touchpad	
Speakers	
Fans	
I/O board	
Heat sink System board	
Display assembly	
Top cover with keyboard	
7 Backing up, restoring, and recovering.	
Backing up information and creating recovery media	
Using Windows tools for backing upUsing the HP Cloud Recovery Download Tool to create a recovery USB flash drive (select products	79
only)	79
Restoring and recovering your system	79
Creating a system restore	80
Restoring and recovery methods	
Recovering using the HP Recovery USB flash drive	
Changing the computer boot order	
Using HP Sure Recover (select products only)	81
8 Using Setup Utility (BIOS)	
Starting Setup Utility (BIOS)	82
Updating Setup Utility (BIOS)	
Determining the BIOS version	
Preparing for a BIOS update	
Downloading a BIOS update	
Installing a BIOS update	84
9 Using HP PC Hardware Diganostics	85

Using HP PC Hardware Diagnostics Windows (select products only)	85
Using an HP PC Hardware Diagnostics Windows hardware failure ID codeID code	85
Accessing HP PC Hardware Diagnostics Windows	85
Accessing HP PC Hardware Diagnostics Windows from HP Support Assistant	85
Accessing HP PC Hardware Diagnostics Windows from the Start menu (select products only)	86
Downloading HP PC Hardware Diagnostics Windows	
Downloading the latest HP PC Hardware Diagnostics Windows version from HPHP.	86
Downloading the HP PC Hardware Diagnostics Windows from the Microsoft Store	
Downloading HP Hardware Diagnostics Windows by product name or number (select products only)	
Installing HP PC Hardware Diagnostics Windows	
Using HP PC Hardware Diagnostics UEFI	
Using an HP PC Hardware Diagnostics UEFI hardware failure ID code	
Starting HP PC Hardware Diagnostics UEFIStarting HP PC Hardware Diagnostics UEFI	
Starting HP PC Hardware Diagnostics UEFI through HP Hotkey Support software (select products only)	
Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive	
Downloading the latest HP PC Hardware Diagnostics UEFI version	
Downloading HP PC Hardware Diagnostics UEFI by product name or number (select products	
only)	89
Using Remote HP PC Hardware Diagnostics UEFI settings (select products only)	89
Downloading Remote HP PC Hardware Diagnostics UEFIUEFI	
Downloading the latest Remote HP PC Hardware Diagnostics UEFI version	89
Downloading Remote HP PC Hardware Diagnostics UEFI by product name or number	90
Customizing Remote HP PC Hardware Diagnostics UEFI settings	90
10 Specifications	91
Computer specifications	91
Display specifications	92
Solid-state drive specifications	92
11 Power cord set requirements	94
Requirements for all countries	94
Requirements for specific countries and regions	94
12 Swelling or deformation of notebook battery	97
Swollen notebook batteries	97
Swollen battery is not a safety issue	97
Discontinue using a swollen battery	97
Replace a swollen battery	97
Minimize battery swelling	97
HP Adaptive Battery Optimizer (consumer notebooks)	
HP Battery Health Manager (commercial notebooks)	98
13 Recycling	99
Index	100

# **Product description**

This table provides detailed product information.

NOTE: For the latest specifications related to your computer, go to <a href="http://www.hp.com/support">http://www.hp.com/support</a> and follow the instructions to find your product. Select Specifications & Accessories, select Product information, and then select the specifications link.

Table 1-1 Product components and their descriptions

Category	Description
Product name	HP OmniBook 7 16 inch Laptop Al PC
	Model numbers: 16-ay0xxx
	CTO model number: 16t-ay000
	HP OmniBook 716 inch Laptop PC
	Model numbers: 16-az0xxx
	CTO model number: 16t-az000
	HP OmniBook 716 inch Laptop Next Gen Al PC
	Model numbers: 16-bh0xxx
	CTO model number: 16t-bh000
Processors	Intel® Core™ Ultrα 7 255H
	Intel Core Ultra 5 225H
	Intel Core 9 270H
	Intel Core 7 240H
	Intel Core 5 220H
	Intel Core 5 210H
Graphics	Intel graphics
	Intel Arc™ Graphics
	Supports:
	HD decode, DX12, and HDMI
	• Optimus
	GPS (GPU Performance Scaling)
	Discrete graphics
	NVIDIA® GeForce RTX® 4050
Display	16.0 in (40.64 cm)
	2 K (2048 × 1280), OLED + low blue light, DCI-P3 100%, BrightView, ultrawide viewing angle (UWVA), embedded DisplayPort™ (eDP) 1.4 + panel self-refresh 2 (PSR), bent panel, 400 nits, 120 Hz, touch screen and non-touch screen

Table 1-1 Product components and their descriptions (continued)

Category	Description		
	2.5 K (2560 × 1600), low blue light, sRGB 100%, antiglare, UWVA, eDP 1.4, 500 nits, 240 Hz (VRR)		
	WUXGA (1920 × 1200), LED, antiglare, sRGB 62.5%, eDP 1.2 without PSR, 300 nits, 60 Hz		
	16:10 aspect ratio		
	Flicker free		
	Microsoft HDR Streaming Capable		
	Microsoft DRR (Dynamic Rate Refresh)		
	Anti smudge		
	EyeSafe Label		
	<ul> <li>Panel certification (TUV + EyeSafe, VESA* HDR 500 or above)</li> </ul>		
	Screen-to-body ratio: 88.24%		
Memory	Supports DDR5-5600 onboard (accessible or upgradeable) memory in the following configurations (255H processors/RTX 4050 graphics):		
	• 32 GB		
	• 32 GB (PRC)		
	• 16 GB		
	• 16 GB (PRC)		
	Supports LPDDR5X-7467 (onboard, not accessible and upgradeable) memory in the following configurations:		
	• 32 GB		
	32 GB (for use in the People's Republic of China [PRC])		
	• 16 GB		
	• 16 GB (PRC)		
	Supports DDR5-5200 (accessible and upgradeable) memory in the following configurations:		
	• 32 GB		
	• 32 GB (PRC)		
	• 24 GB		
	• 24 GB (PRC)		
	• 16 GB		
	• 16 GB (PRC)		
Primary storage	PCle, Non-Volatile Memory express (NVMe), M.2 2280 solid-state drives		
	2 TB		
	1TB		
	1TB (PRC)		
	512 GB		
	512 GB (PRC)		

Table 1-1 Product components and their descriptions (continued)

Category	Description	
Audio and video	Dual speakers	
	Poly Studio	
	HP Audio Boost 2.0	
	DTS:X Ultra	
Video	<b>HP 5 MP Camera</b> : USB2, indicator LED, 1 × infrared (IR) LED, f2.0, 5 MP BSI sensor, WDR/TNR/HDR, 88° wide field-of-view (WFOV)	
	Dual-array digital microphone with appropriate software: beam forming, echo cancellation, noise suppression	
	Supports Windows Hello and HPD (Human Presence Device, adaptive audio, screen distance, screen time)	
	5 MP by 30 frames per second	
Wireless	Integrated wireless module (M.2 2230)	
	MediaTek Wi-Fi® 7 MT7925 + Bluetooth® 5.4	
	Intel Wi-Fi 7 BE201 Bluetooth 5.4	
	Intel AX211 Wi-Fi 6E Bluetooth 5.3	
	Compatible with Miracast® devices	
	Supports Modern Standby (Connected)	
	Bluetooth Audio Offload	
	Bluetooth LE Audio	
	Wi-Fi BIOS SAR	
	Dynamic antenna gain	
	UNII-4 5 GHz channel	
Ports	Audio-out (headphone)/audio-in (microphone) combo jack	
	HDMI v2.1 + HDCP 2.3 (supports up to 4K @ 60 Hz)	
	USB 3.2 Gen 2 Type-A (right side)	
	USB 3.2 Gen 1 Type-A (left side)	
	USB 3.2 Gen 2 Type-C® (right side)	
	Data transfer	
	Power delivery	
	HP Sleep & Charge	
	DisplayPort 1.4a out up to 4K @ 60 Hz	
	HDMI 2.1 out up to 4K @ 60 Hz	

Table 1-1 Product components and their descriptions (continued)

Category	Description		
	USB Type-C Thunderbolt™ Gen 4 (right side):		
	Data transfer		
	Power delivery		
	HP Sleep & Charge		
	DisplayPort 2.1 out up to 8K @ 60 Hz		
	DisplayPort 1.4 out up to 4K @ 60 Hz		
	<ul> <li>HDMI 2.1 out up to 4K @ 60 Hz</li> </ul>		
Keyboard/pointing devices	<b>Keyboard</b> (with numeric keypad, backlit)		
	Touchpad requirements		
	Clickpad with image sensor		
	Multitouch gestures enabled		
	Precision touchpad		
	Modern trackpad gestures		
	Taps enabled as default		
Power requirements	Battery (HP Long Life)		
	4 cell, 70 Whr		
	HP Fast Charge Technology		
	Smart AC adapters (USB-C*, slim, straight) (select products only)		
100 W			
	Power cord (select products only)		
	C5, premium, 1 m (3.3 ft), sticker		
Security	Supports firmware Trusted Platform Module (fTPM) 2.0		
	Microphone mute		
	Camera privacy cover		
Operating system	Windows® 11 Home 64 NextGen Premium		
	Windows 11 Home 64 NextGen Standard		
	Windows 11 Pro 64 NextGen Premium		
	Windows 11 Pro 64 NextGen Standard		
	Windows 11 Home 64 NextGen Premium Single Language Africa Market PPP		
	Windows 11 Home 64 NextGen Standard Single Language Africa Market PPP		
	Windows 11 Home 64 NextGen Premium Single Language APAC EM PPP		
	Windows 11 Home 64 NextGen Standard Single Language APAC EM PPP		
	Windows 11 Home 64 NextGen Premium Chinese Market CPPP		

Table 1-1 Product components and their descriptions (continued)

Category	Description	
	Windows 11 Home 64 NextGen Standard Chinese Market CPPP	
	Windows 11 Home 64 NextGen Premium Single Language India Market PPP	
	Windows 11 Home 64 NextGen Standard Single Language India Market PPP	
	Windows 11 Home 64 NextGen Premium Single Language Indonesia Market PPP	
	Windows 11 Home 64 NextGen Standard Single Language Indonesia Market PPP	
Serviceability	End user replaceable parts	
	AC adapter	
	Bottom cover	
	Battery	

# 2 Getting to know your computer

Your computer features top-rated components. This chapter provides details about your components, where they are located, and how they work.

## Right side

Identify the components on the right side of the computer.

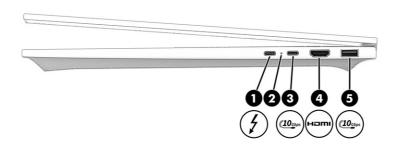


Table 2-1 Right-side components and their descriptions

		Component	Description
(1)	4	USB Type-C® power connector and Thunderbolt™ port with HP Sleep and Charge and DisplayPort output	Connects an AC adapter that has a USB Type-C connector, supplying power to the computer and, if needed, charging the computer battery.
			- and -
			Connects a USB device, provides high-speed data transfer, and charges small devices (such as a smartphone), even when the computer is off.
			NOTE: Use a standard USB Type-C charging cable or cable adapter (purchased separately) when charging a small external device.
			- and -
			Connects a display device that has a USB Type-C connector, providing DisplayPort output.
			NOTE: Your computer might also support a Thunderbolt docking station.
(2)		AC adapter and battery light	White: The AC adapter is connected and the battery is fully charged.
			Blinking amber: The AC adapter is disconnected and the battery has reached a low battery level.
			Amber: The AC adapter is connected and the battery is charging.
			Off: The battery is not charging.

6

Table 2-1 Right-side components and their descriptions (continued)

		Component	Description
(3)	(10 <sub>Gbps</sub>	USB Type-C power connector and 10 Gbps port with HP Sleep and Charge and DisplayPort output	Connects an AC adapter that has a USB Type-C connector, supplying power to the computer and, if needed, charging the computer battery.
			- and -
			Connects a USB device, provides high-speed data transfer, and charges small devices (such as a smartphone), even when the computer is off.
			NOTE: Use a standard USB Type-C charging cable or cable adapter (purchased separately) when charging a small external device.
			- and -
			Connects a display device that has a USB Type-C connector, providing DisplayPort output.
(4)	нэті	HDMI port	Connects an optional video or audio device, such as a high-definition television, any compatible digital or audio component, or a high-speed High-Definition Multimedia Interface (HDMI) device.
(5)	(10 <sub>Gbps</sub>	USB 10 Gbps port	Connects a USB device, provides high-speed data transfer, and (for select products) charges small devices (such as a smartphone) when the computer is on or in Sleep mode.
			NOTE: Use a standard USB Type-A charging cable or cable adapter (purchased separately) when charging a small external device.

## Left side

Identify the components on the left side of the computer.

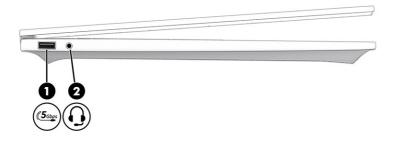


Table 2-2 Left-side components and their descriptions

		Component	Description
(1)	(5 <sub>Gbp</sub> s	USB 5 Gbps port	Connects a USB device, provides high-speed data transfer, and (for select products) charges small devices (such as a smartphone) when the computer is on or in Sleep mode.  NOTE: Use a standard USB Type-A charging cable or cable adapter (purchased separately) when charging a small external device.

Table 2-2 Left-side components and their descriptions (continued)

		Component	Description
(2)	O	Audio-out (headphone)/Audio-in (microphone) combo jack	Connects optional powered stereo speakers, headphones, earbuds, a headset, or a television audio cable. Also connects an optional headset microphone. This jack does not support optional standalone microphones.  WARNING! To reduce the risk of personal injury, adjust the
			volume before putting on headphones, earbuds, or a headset. For additional safety information, see the <i>Regulatory, Safety, and Environmental Notices</i> .
			To access this guide:
			<ul> <li>Select the Search icon in the taskbar, type HP         Documentation in the search box, and then select HP         Documentation.     </li> <li>NOTE: When a device is connected to the jack, the computer speakers are disabled.</li> </ul>

## **Display**

The computer display can include essential components such as speakers, antennas, cameras, and microphones.

### Low blue light mode (select products only)

Your computer display is shipped from the factory in low blue light mode for improved eye comfort and safety. Also, blue light mode automatically adjusts blue light emissions when you are using the computer at night or for reading.

MARNING! To reduce the risk of serious injury, read the Safety & Comfort Guide. It describes proper workstation setup and proper posture, health, and work habits for computer users. The Safety & Comfort Guide also provides important electrical and mechanical safety information. The Safety & Comfort Guide is available on the web at http://www.hp.com/ergo.

### Wake-on-voice (select products only)

Use the wake-on-voice feature to bring the computer out of the Sleep state quickly.

To access the wake-on-voice settings, follow these steps:

- Select the Search icon in the taskbar, type XiaoWei in the search box, and then select XiaoWei.
- 2. When the tool opens, scan the QR code with your mobile device, which takes you to the settings page, where you can select your wake-on-voice features.
- Follow the on-screen instructions.
- NOTE: Allow the XiaoWei app to continue running on the computer.

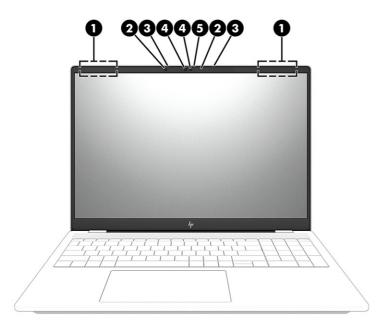


Table 2-3 Display components and their descriptions

	Component	Description
(1)	WLAN antennas (2)*	Send and receive wireless signals to communicate with wireless local area networks (WLANs).
(2)	Camera lights (2)	On: One or more cameras are in use.
(3)	Internal microphones (2)	Record sound.
(4)	Cameras (2)	Allow you to video chat, record video, and record still images. Some cameras also allow a facial recognition logon to Windows®, instead of a password logon.
		<b>NOTE:</b> Camera functions vary depending on the camera hardware and software installed on your product.
(5)	Camera privacy cover	By default, the camera lens is uncovered, but you can slide the camera privacy cover to block the camera's view. To use the camera, slide the camera privacy cover in the opposite direction to reveal the lens.

<sup>\*</sup>The antennas are not visible from the outside of the computer. For optimal transmission, keep the areas immediately around the antennas free from obstructions.

For wireless regulatory notices, see the section of the *Regulatory, Safety, and Environmental Notices* that applies to your country or region.

To access this guide:

• Select the Search icon in the taskbar, type HP Documentation in the search box, and then select HP Documentation.

## Keyboard area

Keyboards can vary by language.

NOTE: The keyboard area, including the function keys and (select products only) power key, is disabled in stand, tent, and tablet modes. To enable the keyboard, including the power key, change to the clamshell mode.

### **Touchpad settings and components**

Learn the touchpad settings and components.

### **Touchpad settings**

Learn how to adjust touchpad settings.

### Adjusting touchpad settings

Use these steps to adjust touchpad settings and gestures.

- Select the Search icon in the taskbar, type touchpad settings in the search box, and then press enter.
- Choose a setting.

#### Turning on the touchpad

Follow these steps to turn on the touchpad.

- Select the Search icon in the taskbar, type touchpad settings in the search box, and then 1. press enter.
- Using an external mouse, click the **touchpad** button.

If you are not using an external mouse, press the Tab key repeatedly until the pointer rests on the touchpad button. Then press the spacebar to select the button.

### **Touchpad components**

Identify the touchpad components.

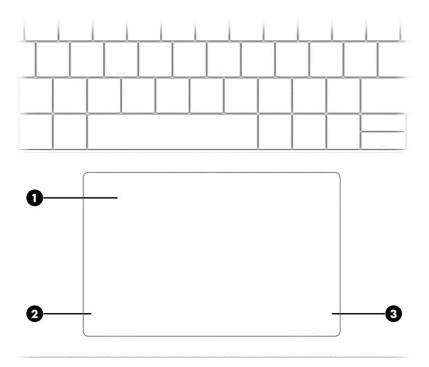


Table 2-4 Touchpad components and their descriptions

	Component Description	
(1)	Touchpad zone	Reads your finger gestures to move the pointer or activate items on the screen.
(2)	Left touchpad button	Functions like the left button on an external mouse.
(3)	Right touchpad button	Functions like the right button on an external mouse.

## Lights

Identify the lights on the computer.

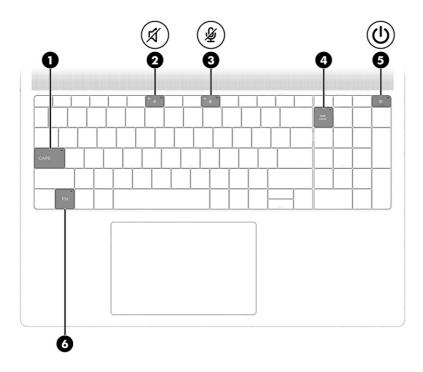


Table 2-5 Lights and their descriptions

		Component	Description
(1)		Caps lock light	On: Caps lock is on, which switches the key input to all capital letters.
(2)	Ø	Mute light	<ul><li>On: Computer sound is off.</li><li>Off: Computer sound is on.</li></ul>
(3)	Ą	Microphone mute light	<ul><li>On: Microphone is off.</li><li>Off: Microphone is on.</li></ul>
(4)		Num lock light	On: Num lock is on.
(5)	Ů	Power light	<ul> <li>On: The computer is on.</li> <li>Blinking (select products only): The computer is in the Sleep state, a power-saving state. The computer shuts off power to the display and other unnecessary components.</li> <li>Off: Depending on your computer model, the computer is off, in Hibernation, or in Sleep. Hibernation is the power-saving state that uses the least amount of power.</li> </ul>
(6)		Fn lock light	On: The fn key is locked.

## Special keys

Identify the special keys.

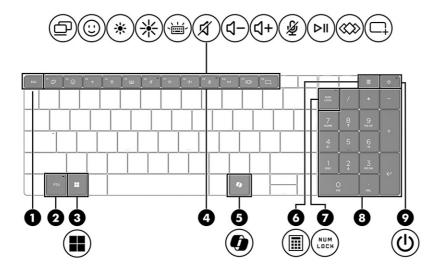


Table 2-6 Special keys and their descriptions

	Component	Description
(1)	esc key	Displays system information when pressed in combination with the fn key.
(2)	fn key	Executes specific functions when pressed in combination with another key.
(3)	Windows key	Opens the Start menu.
		NOTE: Pressing the Windows key again will close the Start menu.
(4)	Action keys	Execute frequently used system functions as defined by the icon symbols on f1 through f12 function keys.
(5)	Windows Copilot key	Opens Windows Copilot (select products only).
		NOTE: Copilot in Windows (select products only) requires Windows 11. Some features require a neural processing unit (NPU). The timing of feature delivery and availability varies by market and device. You must have a Microsoft account to use the Copilot feature. When the Copilot feature is not available, pressing the Copilot key opens the Bing search engine. See <a href="http://aka.ms/WindowsAlFeatures">http://aka.ms/WindowsAlFeatures</a> .
(6)	Calculator key	Opens the calculator.
(7)	num lock key	Alternates between the navigational and numeric functions on the integrated numeric keypad.
(8)	Integrated numeric keypad	A separate keypad to the right of the alphabet keyboard. When num lock is pressed, the keypad can be used like an external numeric keypad.
		<b>NOTE:</b> If the keypad function is active when the computer is turned off, that function is reinstated when the computer is turned back on.

Table 2-6 Special keys and their descriptions (continued)

		Component	Description
(9)	<b>(</b> l)	Power key	When the computer is off, press the key briefly to turn on the computer.
			<ul> <li>When the computer is on, press the key briefly to initiate Sleep.</li> </ul>
			<ul> <li>When the computer is in the Sleep state, press the key briefly to exit Sleep (select products only).</li> </ul>
			<ul> <li>When the computer is in Hibernation, press the key briefly to exit Hibernation.</li> </ul>
			IMPORTANT: Pressing and holding down the power key results in the loss of unsaved information.
			If the computer has stopped responding and shutdown procedures are ineffective, press and hold the power key down for at least 10 seconds to turn off the computer.
			To learn more about your power and sleep settings:
			Right-click the <b>Power</b> icon , and then select <b>Power</b>
			and sleep settings.

## **Bottom**

Identify the bottom components.

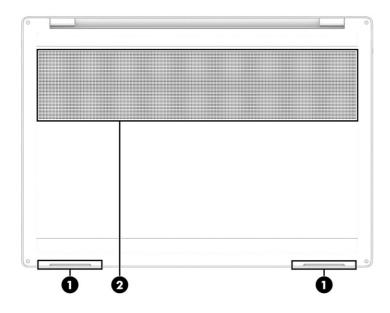


Table 2-7 Bottom components and their descriptions

	Component	Description
(1)	Speakers (2)	Produce sound.

Table 2-7 Bottom components and their descriptions (continued)

	Component	Description
(2)	Vent	Enables airflow to cool internal components.
		<b>NOTE:</b> The computer fan starts up automatically to cool internal components and prevent overheating. It is normal for the internal fan to cycle on and off during routine operation.

### Labels

The labels affixed to the computer provide information that you might need when you troubleshoot system problems or travel internationally with the computer. Labels can be in paper form or imprinted on the product.

- IMPORTANT: Check the following locations for the labels described in this section: the bottom of the computer, inside the battery bay, under the service door, on the back of the display, or on the bottom of a tablet kickstand.
  - Service label—Provides important information to identify your computer. When contacting support, you might be asked for the serial number, the product number, or the model number. Locate this information before you contact support.

Your service label will resemble the following example.



Table 2-8 Service label components

	Component
(1)	Serial number
(2)	Product ID
(3)	HP product name and model number

- Regulatory labels—Provide regulatory information about the computer.
- Wireless certification labels—Provide information about optional wireless devices and the approval markings for the countries or regions in which the devices have been approved for use.

# 3 Illustrated parts catalog

Use this chapter to determine the spare parts that are available for the computer.

## Computer major components

To identify the computer major components, use this illustration and table.

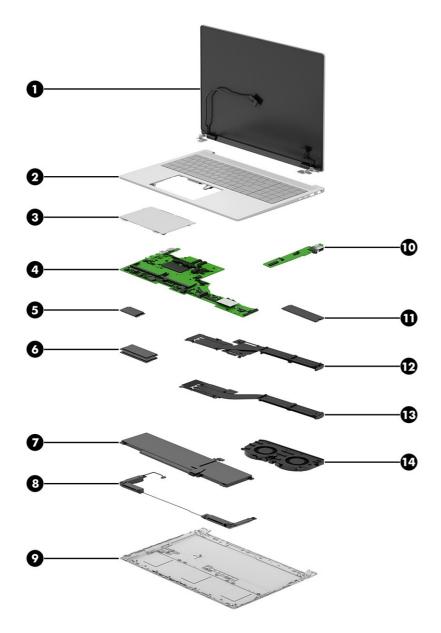


Table 3-1 Computer major component descriptions and part numbers

Item	Component	Spare part numbe
(1)	Display assembly	not available as a
	NOTE: Display assemblies are offered as spare parts only at a subcomponent level.	spare part
(2)	Top cover with keyboard	
	NOTE: For a detailed list of country codes, see <u>Top cover with keyboard on page 78</u> .	
	Glacier silver models with an Intel Core Ultra processor	P36159-xx1
	Meteor silver models with an Intel Core Ultra processor	P36160-xx1
	Glacier silver models with an Intel Core processor	P39032-xx1
	Meteor silver models with an Intel Core processor	P39033-xx1
3)	Touchpad (includes cable)	
	Glacier silver	P36142-001
	Meteor silver	P36143-001
(4)	System board (includes processor and GeForce RTX™ 4050 graphics)	
	Intel Core 9 270H processor	P36149-601
	Intel Core 7 240H processor	P36151-601
	Intel Core 5 220H processor	P36150-601
	Intel Core 5 210H processor	P36152-601
	Intel Core Ultra 7 255H processor	P36146-601
	Intel Core Ultra 7 255H processor (PRC)	P36153-601
	Intel Core Ultra 5 225H processor	P36147-601
	Intel Core Ultra 5 225H processor (PRC)	P36154-601
	Intel Core Ultra 7 255H processor and NVIDIA GeForce RTX 4050 graphics	P36148-601
5)	WLAN module	
	Intel AX211 Wi-Fi 6E Bluetooth 5.3	M53366-005
	Intel Wi-Fi 7 BE201 Bluetooth 5.4	N86466-005
	MediaTek Wi-Fi 7 MT7925 + Bluetooth 5.4 M.2 2230	N64647-005
6)	Memory modules	
	16 GB	N77399-005
	12 GB	P33447-005
	8 GB	N77398-005
7)	Battery (includes revive kit)	P08167-001
	NOTE: The battery cable is available in the Cable Kit as spare part number P36131-001.	
(8)	Speakers (left and right)	P36141-001
9)	Bottom cover	P36128-001
	Glacier silver	P36127-001

Table 3-1 Computer major component descriptions and part numbers (continued)

Item	Component	Spare part number
	Meteor silver	P36128-001
(10)	I/O board (includes cable)	P36137-001
(11)	Solid-state drive (PCIe)	
	2TB	P07215-005
	1TB	N77394-005
	512 GB	N77392-005
	Heat sink	
(12)	Heat sink (models with discrete graphics)	P36134-001
(13)	Heat sink (models with integrated UMA graphics)	P36135-001
(14)	Fans	P36133-001

# Display assembly subcomponents, touch models

To identify the display assembly subcomponents, use this illustration and table.

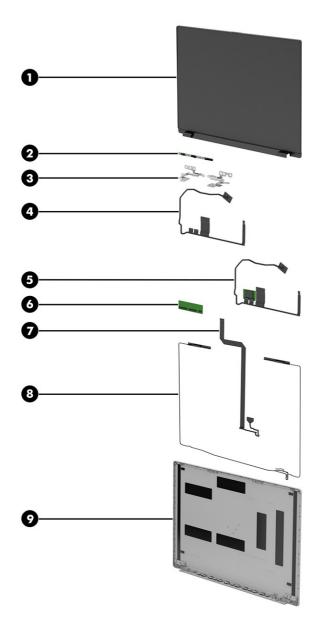


Table 3-2 Display component descriptions and part numbers

Item	Component	Spare part number
(1)	Display panel (includes cable and panel stretchable tape)	
	Glacier silver	P36155-001
	Meteor silver	P36156-001
(2)	Camera module (includes cable, rubber piece, and panel stretchable tape)	P36144-001
(3)	Hinges (left and right, includes panel stretchable tape)	P36136-001
(4)	Display panel cable (includes panel stretchable tape)	P36132-001
(5)	OLED power board with display cable	P36138-001
(6)	Touch control board (includes cable and panel stretchable tape)	P36139-001

Table 3-2 Display component descriptions and part numbers (continued)

Item	Component	Spare part number
(7)	Camera cable (included in the Cable Kit; includes panel stretchable tape)	P36131-001
(8)	Wireless antenna kit (included in the Cable Kit)	P36131-001
(9)	Display back cover (includes wireless antennas and panel stretchable tape)	
	Glacier silver, OLED	P36121-001
	Glacier silver, 2.5 K	P36122-001
	Glacier silver WUXGA	P36123-001
	Meteor silver, OLED	P36124-001
	Meteor silver, 2.5 K	P36125-001
	Meteor silver, WUXGA	P36126-001

# Display assembly subcomponents, nontouch models

To identify the display assembly subcomponents, use this illustration and table.

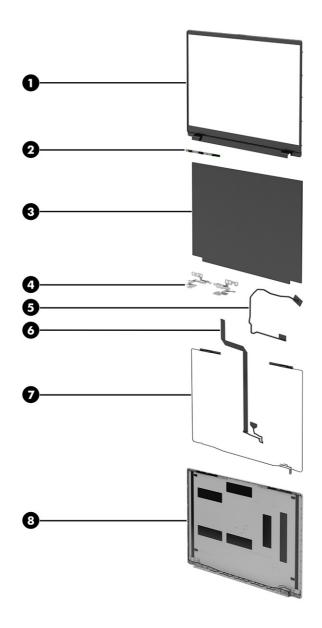


Table 3-3 Display component descriptions and part numbers

Item	Component	Spare part number
(1)	Display bezel	
	Glacier silver	P36129-001
	Meteor silver	P36130-001
(2)	Camera module (includes cable, rubber piece, and panel stretchable tape)	P36145-001
(3)	Display panel (includes cable and panel stretchable tape)	
	WUXGA, 60 Hz	P36157-001
	2.5 K, 240 Hz	P36158-001
(4)	Hinges (left and right, includes panel stretchable tape)	P36136-001

Table 3-3 Display component descriptions and part numbers (continued)

Item	Component	Spare part number
(5)	Display panel cable (includes panel stretchable tape)	P36132-001
(6)	Camera cable (included in the Cable Kit; includes panel stretchable tape)	P36131-001
(7)	Wireless antenna kit (included in the Cable Kit)	P36131-001
(8)	Display back cover (includes wireless antennas and panel stretchable tape)	
	Glacier silver, OLED	P36121-001
	Glacier silver, 2.5 K	P36122-001
	Glacier silver WUXGA	P36123-001
	Meteor silver, OLED	P36124-001
	Meteor silver, 2.5 K	P36125-001
	Meteor silver, WUXGA	P36126-001

# Miscellaneous parts

To identify the miscellaneous parts, use this table.

Table 3-4 Miscellaneous part descriptions and part numbers

Component	Spare part number
AC adapter (100 W, nPFC, USB-C)	N57045-001
Screw and Thermal Pad Kit	P36140-001
Cable Kit (includes USB board cable, touchpad cable, battery cable, camera cable, and wireless antennas and cables)	P36131-001
Power cords (C5, premium, 1.0 m [3.3 ft])	
Australia	L22327-001
Denmark	L22322-001
Europe (Austria, Belgium, Finland, France, Germany, the Netherlands, Norway, and Sweden)	L22321-001
India	L22624-001
Israel	L22323-001
Japan	L22330-001
North America	L22319-001
PRC	L21930-001
South Africa	L22325-001
South Korea	L22328-001
Switzerland	L22324-001
Taiwan	L22329-001
Thailand	L22326-001
Thailand (bundle)	M85421-001

Table 3-4 Miscellaneous part descriptions and part numbers (continued)

Component	Spare part number
United Kingdom	L22320-001

## 4 Removal and replacement procedures preliminary requirements

Use this information to properly prepare to disassemble and reassemble the computer.

## **Tools required**

You need the following tools to complete the removal and replacement procedures:

- Nonconductive, nonmarking pry tool
- Magnetic Phillips P2 screwdriver
- **Tweezers**
- Suction cups

### Service considerations

The following sections include some of the considerations that you must keep in mind during disassembly and assembly procedures.



🛱 NOTE: As you remove each subassembly from the computer, place the subassembly and all accompanying screws away from the work area to prevent damage.

### Plastic parts

Using excessive force during disassembly and reassembly can damage plastic parts.

### Cables and connectors

Handle cables with extreme care to avoid damage.

IMPORTANT: When servicing the computer, be sure that cables are placed in their proper locations during the reassembly process. Improper cable placement can damage the computer.

Apply only the tension required to unseat or seat the cables during removal and insertion. Handle cables by the connector whenever possible. In all cases, avoid bending, twisting, or tearing cables. Be sure that cables are routed so that they cannot be caught or snagged as you remove or replace parts. Handle flex cables with extreme care; these cables tear easily.

### **Drive handling**

Note the following guidelines when handling drives.

MPORTANT: Drives are fragile components. Handle them with care. To prevent damage to the computer, damage to a drive, or loss of information, observe these precautions:

- Before removing or inserting a hard drive, shut down the computer. If you are unsure whether the
  computer is off or in Hibernation or Sleep mode, turn the computer on, and then shut it down
  through the operating system.
- Before handling a drive, be sure that you are discharged of static electricity. While handling a drive, avoid touching the connector.
- Before removing an optical drive, be sure that a disc is not in the drive, and be sure that the optical
  drive tray is closed.
- Handle drives on surfaces covered with at least 2.54 cm (1 inch) of shock-proof foam.
- Avoid dropping drives from any height onto any surface.
- After removing a hard drive or an optical drive, place it in a static-proof bag.
- Avoid exposing an internal hard drive to products that have magnetic fields, such as monitors or speakers.
- Avoid exposing a drive to temperature extremes or liquids.
- If a drive must be mailed, place the drive in a bubble pack mailer or other suitable form of protective packaging, and label the package "FRAGILE."

## Electrostatic discharge information

A sudden discharge of static electricity from your finger or other conductor can destroy static-sensitive devices or microcircuitry. Often the spark is neither felt nor heard, but damage occurs. An electronic device exposed to electrostatic discharge (ESD) might not appear to be affected at all and can work perfectly throughout a normal cycle. The device might function normally for a while, but it has been degraded in the internal layers, reducing its life expectancy.

Networks built into many integrated circuits provide some protection, but in many cases, the discharge contains enough power to alter device parameters or melt silicon junctions.

- **IMPORTANT:** To prevent damage to the device when you remove or install internal components, observe these precautions:
  - Keep components in their electrostatic-safe containers until you are ready to install them.
  - Before touching an electronic component, discharge static electricity by using the guidelines described in Personal grounding methods and equipment on page 26.
  - Avoid touching pins, leads, and circuitry. Handle electronic components as little as possible.
  - If you remove a component, place it in an electrostatic-safe container.

### Generating static electricity

Follow these static electricity guidelines:

- Different activities generate different amounts of static electricity.
- Static electricity increases as humidity decreases.

Table 4-1 Static electricity occurrence based on activity and humidity

Event	55% relative humidity	40% relative humidity	10% relative humidity
Walking across carpet	7,500 V	15,000 V	35,000 V
Walking across vinyl floor	3,000 V	5,000 V	12,000 V
Motions of bench worker	400 V	800 V	6,000 V
Removing dual in-line packages (DIPs) from plastic tube	400 V	700 V	2,000 V
Removing DIPs from vinyl tray	2,000 V	4,000 V	11,500 V
Removing DIPs from polystyrene foam	3,500 V	5,000 V	14,500 V
Removing bubble pack from PCB (printed circuit board)	7,000 V	20,000 V	26,500 V
Packing PCBs in foam-lined box	5,000 V	11,000 V	21,000 V



NOTE: Multiple electric components can be packaged together in plastic tubes, trays, or polystyrene foam.

As little as 700 V of static electricity can degrade a product.

### Preventing electrostatic damage to equipment

Many electronic components are sensitive to ESD. Circuitry design and structure determine the degree of sensitivity.

The following packaging and grounding precautions are necessary to prevent static electricity damage to electronic components:

- To avoid hand contact, transport products in static-safe containers such as tubes, bags, or boxes.
- Protect all electrostatic parts and assemblies with conductive or approved containers or packaging.
- Keep electrostatic-sensitive parts in their containers until they arrive at static-free stations.
- Place items on a grounded surface before removing them from their container.
- Always be properly grounded when touching a sensitive component or assembly.
- Avoid contact with pins, leads, or circuitry.
- Place reusable electrostatic-sensitive parts from assemblies in protective packaging or conductive foam.

### Personal grounding methods and equipment

Using certain equipment can prevent static electricity damage to electronic components.

- Wrist straps are flexible straps with a maximum of  $1\,\mathrm{M}\Omega$  ±10% resistance in the ground cords. To provide proper ground, wear a strap snug against bare skin. Verify that the ground cord is connected and fits snugly into the banana plug connector on the grounding mat or workstation.
- You can use **heel straps, toe straps, and boot straps** at standing workstations. These straps are compatible with most types of shoes or boots. On conductive floors or dissipative floor mats, use them on both feet with a maximum of  $1 \, \text{M}\Omega \pm 10\%$  resistance between the operator and ground.

Table 4-2 Static shielding protection levels

Method	Voltage
Antistatic plastic	1,500
Carbon-loaded plastic	7,500
Metallized laminate	15,000

### Grounding the work area

To prevent static damage at the work area, follow these precautions:

- Cover the work surface with approved static-dissipative material.
- Use a wrist strap connected to a properly grounded work surface and use properly grounded tools and equipment.
- Use static-dissipative mats, foot straps, or air ionizers to give added protection.
- Handle electrostatic sensitive components, parts, and assemblies by the case or PCB laminate.
   Handle them only at static-free work areas.
- Turn off power and input signals before inserting and removing connectors or test equipment.
- Use fixtures made of static-safe materials when fixtures must directly contact dissipative surfaces.
- Keep the work area free of nonconductive materials, such as ordinary plastic assembly aids and polystyrene foam.
- Use conductive field service tools, such as cutters, screwdrivers, and vacuums.
- Avoid contact with pins, leads, or circuitry.

### Recommended materials and equipment

HP recommends certain materials and equipment to prevent static electricity:

- Antistatic tape
- Antistatic smocks, aprons, or sleeve protectors
- Conductive bins and other assembly or soldering aids
- Conductive foam
- Conductive tabletop workstations with ground cord of 1 M $\Omega$  ±10% resistance
- Static-dissipative table or floor mats with hard tie to ground
- Field service kits
- Static awareness labels
- Wrist straps and footwear straps providing  $1 M\Omega \pm 10\%$  resistance
- Material handling packages
- Conductive plastic bags

- Conductive plastic tubes
- Conductive tote boxes
- Opaque shielding bags
- Transparent metallized shielding bags
- Transparent shielding tubes

## Cleaning your computer

Cleaning your computer regularly removes dirt and debris so that your device continues to operate at its best. Use the following information to safely clean the external surfaces of your computer.

### **Enabling HP Easy Clean (select products only)**

HP Easy Clean helps you to avoid accidental input while you clean the computer surfaces. This software disables devices such as the keyboard, touch screen, and touchpad for a preset amount of time so that you can clean all computer surfaces.

- Start HP Easy Clean in one of the following ways:
  - Select the Start menu, and then select HP Easy Clean.
  - Select the HP Easy Clean icon in the taskbar.
  - Select Start, and then select the HP Easy Clean tile.
- 2. Now that your device is disabled for a short period, see Removing dirt and debris from your computer on page 28 for the recommended steps to clean the high-touch, external surfaces on your computer. After you remove the dirt and debris, you can also clean the surfaces with a disinfectant. See Cleaning your computer with a disinfectant on page 29 for guidelines to help prevent the spread of harmful bacteria and viruses.

### Removing dirt and debris from your computer

Here are the recommended steps to clean dirt and debris from your computer.

For computers with wood veneer, see Caring for wood veneer (select products only) on page 30.

- Wear disposable gloves made of latex (or nitrile gloves, if you are latex-sensitive) when cleaning the surfaces.
- Turn off your device and unplug the power cord and other connected external devices. Remove any installed batteries from items such as wireless keyboards.
- ⚠ CAUTION: To prevent electric shock or damage to components, never clean a product while it is turned on or plugged in.
- Moisten a microfiber cloth with water. The cloth should be moist, but not dripping wet.
- [] IMPORTANT: To avoid damaging the surface, avoid abrasive cloths, towels, and paper towels.

- 4. Wipe the exterior of the product gently with the moistened cloth.
- IMPORTANT: Keep liquids away from the product. Avoid getting moisture in any openings. If liquid makes its way inside your HP product, it can cause damage to the product. Do not spray liquids directly on the product. Do not use aerosol sprays, solvents, abrasives, or cleaners containing hydrogen peroxide or bleach that might damage the finish.
- Start with the display (if applicable). Wipe carefully in one direction, and move from the top of the display to the bottom. Finish with any flexible cables, like power cord, keyboard cable, and USB cables.
- Be sure that surfaces have completely air-dried before turning the device on after cleaning.
- 7. Discard the gloves after each cleaning. Clean your hands immediately after you remove the gloves.

See <u>Cleaning your computer with a disinfectant on page 29</u> for recommended steps to clean the high-touch, external surfaces on your computer to help prevent the spread of harmful bacteria and viruses.

### Cleaning your computer with a disinfectant

The World Health Organization (WHO) recommends cleaning surfaces, followed by disinfection, as a best practice for preventing the spread of viral respiratory illnesses and harmful bacteria.

After cleaning the external surfaces of your computer using the steps in Removing dirt and debris from your computer on page 28, Caring for wood veneer (select products only) on page 30, or both, you might also choose to clean the surfaces with a disinfectant. A disinfectant that is within HP's cleaning guidelines is an alcohol solution consisting of 70% isopropyl alcohol and 30% water. This solution is also known as rubbing alcohol and is sold in most stores.

Follow these steps when disinfecting high-touch, external surfaces on your computer:

- Wear disposable gloves made of latex (or nitrile gloves, if you are latex-sensitive) when cleaning the surfaces.
- 2. Turn off your device and unplug the power cord and other connected external devices. Remove any installed batteries from items such as wireless keyboards.
- ⚠ CAUTION: To prevent electric shock or damage to components, never clean a product while it is turned on or plugged in.
- 3. Moisten a microfiber cloth with a mixture of 70% isopropyl alcohol and 30% water. The cloth should be moist, but not dripping wet.
  - ▲ CAUTION: Do not use any of the following chemicals or any solutions that contain them, including spray-based surface cleaners: bleach, peroxides (including hydrogen peroxide), acetone, ammonia, ethyl alcohol, methylene chloride, or any petroleum-based materials, such as gasoline, paint thinner, benzene, or toluene.
- [] IMPORTANT: To avoid damaging the surface, avoid abrasive cloths, towels, and paper towels.
- 4. Wipe the exterior of the product gently with the moistened cloth.
- IMPORTANT: Keep liquids away from the product. Avoid getting moisture in any openings. If liquid makes its way inside your HP product, it can cause damage to the product. Do not spray liquids directly on the product. Do not use aerosol sprays, solvents, abrasives, or cleaners containing hydrogen peroxide or bleach that might damage the finish.

- 5. Start with the display (if applicable). Wipe carefully in one direction, and move from the top of the display to the bottom. Finish with any flexible cables, like power cord, keyboard cable, and USB cables.
- 6. Be sure that surfaces have completely air-dried before turning the device on after cleaning.
- 7. Discard the gloves after each cleaning. Clean your hands immediately after you remove the gloves.

## Caring for wood veneer (select products only)

Your product might feature high-quality wood veneer. As with all natural wood products, proper care is important for best results over the life of the product. Because of the nature of natural wood, you might see unique variations in the grain pattern or subtle variations in color, which are normal.

- Clean the wood with a dry, static-free microfiber cloth or chamois.
- Avoid cleaning products containing substances such as ammonia, methylene chloride, acetone, turpentine, or other petroleum-based solvents.
- Do not expose the wood to sun or moisture for long periods of time.
- If the wood becomes wet, dry it by dabbing with an absorbent, lint-free cloth.
- Avoid contact with any substance that might dye or discolor the wood.
- Avoid contact with sharp objects or rough surfaces that might scratch the wood.

See Removing dirt and debris from your computer on page 28 for the recommended steps to clean the high-touch, external surfaces on your computer. After you remove the dirt and debris, you can also clean the surfaces with a disinfectant. See Cleaning your computer with a disinfectant on page 29 for sanitizing guidelines to help prevent the spread of harmful bacteria and viruses.

## Packaging and transporting guidelines

Follow these grounding guidelines when packaging and transporting equipment:

- To avoid hand contact, transport products in static-safe tubes, bags, or boxes.
- Protect ESD-sensitive parts and assemblies with conductive or approved containers or packaging.
- Keep ESD-sensitive parts in their containers until the parts arrive at static-free workstations.
- Place items on a grounded surface before removing items from their containers.
- Always be properly grounded when touching a component or assembly.
- Store reusable ESD-sensitive parts from assemblies in protective packaging or nonconductive foam.
- Use transporters and conveyors made of antistatic belts and roller bushings. Be sure that
  mechanized equipment used for moving materials is wired to ground and that proper materials
  are selected to avoid static charging. When grounding is not possible, use an ionizer to dissipate
  electric charges.

## Accessing support information

To find the HP support that you need, use this information.

Table 4-3 Support information locations

Service consideration	Path to access information
Records of reported failure incidents stored on the computer	Windows:
on the computer	Preoperating system failures are logged in the BIOS Event Log. To view the BIOS Event Log:
	1. Press the power button.
	2. Immediately and repeatedly press esc when the power button light turns white.
	<b>NOTE:</b> If you do not press esc at the appropriate time, you must restart the computer and again repeatedly press esc when the power button light turns white to access the utility.
	3. Press f10 to enter the BIOS setup.
	4. Complete one of these tasks:
	<ul> <li>(On commercial products) Under the Main tab, select BIOS event log, and then select View BIOS Event Log.</li> </ul>
	<ul> <li>(On consumer products) Under the Main tab, select System Log.</li> </ul>
	Post-operating system failures are logged in the Event Viewer.
	1. Turn on the computer and allow the operating system to open.
	2. Select the search icon in the taskbar.
	3. Type Event Viewer, and then press enter.
	4. Select the log from the left panel. Details display in the right panel.
	Chrome™:
	1. Go to support.google.com/chrome.
	2. Search collect Chrome device logs.
Technical bulletins	To locate technical bulletins:
	1. Go to www.hp.com.
	2. Place the cursor over <b>Problem solving</b> to display more options.
	3. Select Support & Troubleshooting.
	<ol> <li>Type the serial number, product number, or product name to go to the product support page.</li> </ol>
	5. Select <b>Advisories</b> to view technical bulletins.
Repair professionals	To locate repair professionals:
	1. Go to www.hp.com.
	2. Place the cursor over <b>Support resources</b> to display more options.
	3. Select Authorized service providers.

Table 4-3 Support information locations (continued)

Service consideration	Path to access Information
Component and diagnosis information, failure detection, and required action	To locate diagnosis information and actions:
railare detection, and required action	1. Go to http://www.hp.com/go/techcenter/pcdiags.
	2. Select Get Support.
	<ol> <li>Near the bottom of the window, select Notebook PCs, and then select your location.</li> </ol>

## 5 Removal and replacement procedures for Customer Self-Repair parts

This chapter provides removal and replacement procedures for Customer Self-Repair parts.

- NOTE: The Customer Self-Repair program is not available in all locations. Installing a part that is not supported by the Customer Self-Repair program can void your warranty. Check your warranty to determine whether Customer Self-Repair is supported in your location.
- NOTE: The HP Support YouTube Channel (in English) has videos that provide step-by-step removal and replacement instructions for many common parts and models.

## Component replacement procedures

To remove and replace computer components, use these procedures.

- NOTE: Details about your computer, including model, serial number, product key, and length of warranty, are on the service tag at the bottom of your computer.
- NOTE: HP continually improves and changes product parts. For complete and current information about supported parts for your computer, go to <a href="https://partsurfer.hp.com/">https://partsurfer.hp.com/</a>, select your country or region, and then follow the on-screen instructions.

Make special note of each screw size and location during removal and replacement.

## Preparation for disassembly

To remove and replace computer components, use these procedures:

For initial safety procedures, see Removal and replacement procedures preliminary requirements on page 24.

- 1. Turn off the computer. If you are unsure whether the computer is off or in Hibernation or Sleep mode, turn the computer on, and then shut it down through the operating system.
- 2. Disconnect the power from the computer by unplugging the power cord from the computer.
- 3. Disconnect all external devices from the computer.

#### **Bottom cover**

To remove the bottom cover, use this procedure and illustration.


Table 5-1 Bottom cover descriptions and part numbers

Description	Spare part number
Glacier silver	P36127-001
Meteor silver	P36128-001

Before removing the bottom cover, prepare the computer for disassembly (see <u>Preparation for disassembly on page 33</u>).

#### Remove the bottom cover:

- Position the computer upside down.
- 2. Loosen the captive Torx T5 or Phillips screw (1) on the bottom cover.
- 3. Remove the Torx T5 or Phillips M2.0 × 4.5 screw (2) from the bottom cover.
- 4. Remove the two Torx T5 or Phillips M2.0 × 3.7 screws (3) from the bottom cover.
- NOTE: The bottom cover includes a captive (not removable) screw (1) that causes the cover to pop up when you loosen the screw. After the cover pops up, do not continue to loosen the captive screw.

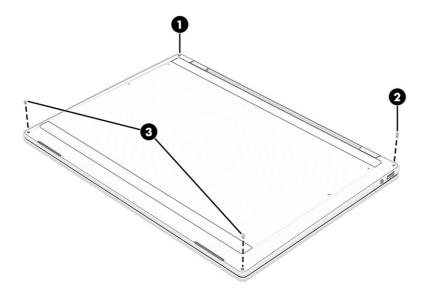

5. Insert a tool (1) near the captive screw to release the cover.

#### 6. Remove the cover (2) from the computer.



To replace the bottom cover, reverse the removal procedures.


When replacing the bottom cover, remove the Feature Byte label from the inside of the old bottom cover and place it on the inside of the new bottom cover. Be sure to keep this label with the computer, because the label is required for any future repairs.

You can locate product labels:

- Laser etched on the old bottom cover.
- In HP System Information by pressing fn + esc when you turn on the computer.




#### NOTE: Bottom cover appearance might vary.

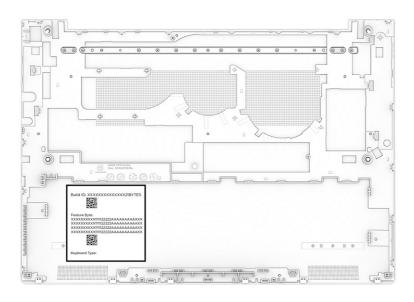


Hand write the product information onto the label of the new bottom cover. Use a ballpoint pen or marker to avoid smudging.

#### **Example of label information**



#### New bottom cover label location

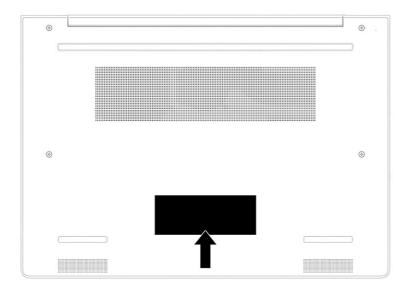

## **Battery**

The battery removal procedure differs depending on whether you are removing and replacing the existing battery or installing a new battery. To install a new battery, you must use a revive kit.

- To remove and replace the existing battery, see Removing and reinstalling the same battery on page 36.
- To install a new battery, see <u>Installing a new battery on page 38</u>.

## Removing and reinstalling the same battery

To remove the battery and reinstall it, use this procedure and illustration.

- ▲ WARNING! To avoid personal injury and damage to the product:
  - Do not puncture, twist, or crack the battery.
  - Do *not* cause an external puncture or rupture to the battery, which can cause a short inside the battery that can result in battery thermal runaway.

- Do not handle or touch the battery enclosure with sharp objects such as tweezers or pliers, which might puncture the battery.
- Do *not* compress or squeeze the battery case with tools or heavy objects stacked on top of the case. These actions can apply undue force on the battery.
- Do not touch the connectors with any metallic surface or object, such as metal tools, screws, or coins, which can cause shorting across the connectors.


For additional battery information, see the *Regulatory, Safety, and Environmental Notices*. To access this guide, select the **Search** icon in the taskbar, type HP Documentation in the search box, and then select **HP Documentation**.

Before removing the battery, follow these steps:

- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- Remove the bottom cover (see <u>Bottom cover on page 33</u>).
- **WARNING!** To reduce potential safety issues, use only the user-replaceable battery provided with the computer, a replacement battery provided by HP, or a compatible battery purchased from HP.
- IMPORTANT: Removing a battery that is the sole power source for the computer can cause loss of information. To prevent loss of information, save your work or shut down the computer through Windows before you remove the battery.

#### Remove the battery:


- 1. Disconnect the battery cable (1) from the system board.
- 2. Remove the five Phillips M2.0 × 4.5 screws (2) that secure the battery to the computer.
- 3. Remove the battery (3) from the computer.

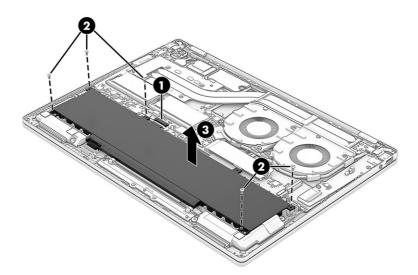

To reinstall the battery, reverse the removal procedures.

NOTE: When replacing the battery, be sure to completely reassemble the computer and plug in the AC adapter before turning the computer on.

When installing the battery, be sure the battery cable is routed on the bottom of the battery as shown in the following illustration.

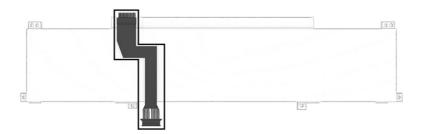

#### Installing a new battery

To install a battery, use these procedures and illustrations. You must use a revive kit to remove the old battery and install a new one. The revive kit includes an empty containment tray and a containment tray with a battery preinstalled.

Table 5-2 Battery description and part number

Description	Spare part number
Battery, 4 cell, 70 Whr (includes revive kit)	P08167-001

Before starting this replacement procedure:

- Ensure other individuals are sufficiently clear of your workspace.
- Ensure your workspace is clear of any flammable material such as paper or oils.
- Locate the nearest ABC dry chemical fire-extinguisher for use in an emergency.
- ▲ WARNING! This procedure requires removing the battery or disconnecting the battery cable. Use care to avoid bending, twisting, or puncturing the battery regardless of its condition. Failure to follow this replacement guide or to use HP recommended tools might damage the system and/or cause a safety hazard.
  - Do *not* remove the battery from the containment tray.
  - Do not handle or touch the battery enclosure with sharp objects such as tweezers or pliers, which might puncture the battery.
  - Do not touch the connectors with any metallic surface or object, such as metal tools, screws, or coins, which can cause shorting across the connectors.

Should a part become stuck or difficult to remove when opening a unit where a swollen battery is suspected, or if the battery becomes stuck in the unit, stop, and contact HP Support for assistance. Do not try to remove a battery by force.




NOTE: Screw locations, latch locations, and internal components might vary.

Before removing the battery, follow these steps:

38

- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- Remove the bottom cover (see <u>Bottom cover on page 33</u>).
- **WARNING!** To reduce potential safety issues, use only the user-replaceable battery provided with the computer, a replacement battery provided by HP, or a compatible battery purchased from HP.
- IMPORTANT: Removing a battery that is the sole power source for the computer can cause loss of information. To prevent loss of information, save your work or shut down the computer through Windows before you remove the battery.
  - 1. Remove the battery using the revive kit:
    - a. Disconnect the battery cable from the system board. The connector location might vary.
    - NOTE: You can disconnect the cable from the battery. The battery spare part kit does not come with the battery cable, so be sure to use the old battery cable or order a new battery cable when replacing the battery.




b. Open the empty battery containment tray.



c. Remove the paper backing layer from the adhesive on the tray.




- d. Turn the tray (1) over so that the adhesive is facing down.
- e. Place the tray (2) centered on the battery.
- f. Press down on the indentations on the tray (3) to adhere it to the battery.



g. Remove the Phillips screws (1) that secure the battery to the computer. Number of screws and screw locations might vary.

h. Lift the top of the tray (2) to remove the battery from the computer.



i. Rotate the battery up and over into the cavity of the containment tray.




NOTE: Please recycle responsibly. For more information about recycling programs, see the HP website at <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a>.

- 2. Install the battery using the revive kit:
  - a. Open the containment tray that includes the new battery.


b. Turn the tray (1) over so the battery is facing downward, and then insert the battery (2) into the computer. Adhesive secures the battery to the tray.



- c. Install the Phillips screws (1) to secure the battery. Number of screws and screw locations might vary.
- d. Lift the containment tray (2) off the battery.



e. Connect the battery cable to the system board. The connector location might vary.



NOTE: When replacing the battery, be sure to completely reassemble the computer and plug in the AC adapter before turning the computer on.

## Solid-state drive, secondary (select products only)

To remove the secondary solid-state drive (SSD), use this procedure and illustration.

Table 5-3 SSD descriptions and part numbers


Description	Spare part number
2 TB	P07215-005
1TB	N77394-005
512 GB	N77392-005

Before removing the secondary SSD, follow these steps:


- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

#### Remove the SSD:

- Locate the secondary SSD:
  - (1) Secondary SSD
  - (2) Primary SSD

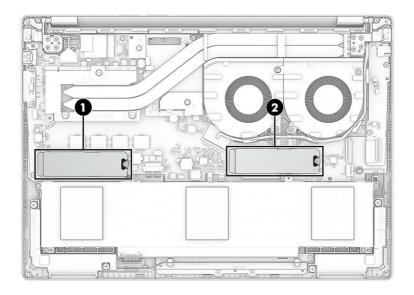


- 2. Remove Phillips M2.0  $\times$  3.0 screw (1) that secures the SSD cover.
- 3. Pull the cover with SSD (2) out of the socket.

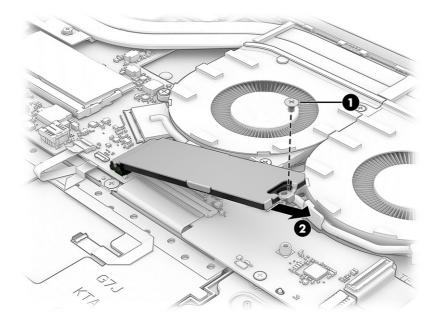


To install a secondary SSD:


1. Peel the film off the top of the SSD cover.



2. Peel the film off the bottom of the SSD cover.



- 3. Insert the module (1) into the socket.
- 4. Place the cover (2) onto the module.
- 5. Install the Phillips screw (3).

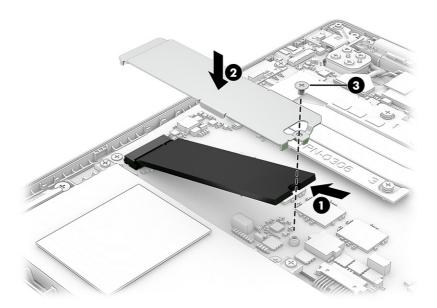

NOTE: SSDs are designed with a notch to prevent incorrect insertion.

# 6 Removal and replacement procedures for authorized service provider parts

This chapter provides removal and replacement procedures for authorized service provider parts.

- IMPORTANT: Only an authorized service provider should access the components described in this chapter. Accessing these parts can damage the computer or void the warranty.
- NOTE: Details about your computer, including model, serial number, product key, and length of warranty, are on the service tag at the bottom of your computer.
- NOTE: The HP Support YouTube Channel (in English) has videos that provide step-by-step removal and replacement instructions for many common parts and models.

## Component replacement procedures

To remove and replace computer components, use the procedures described in this section.

NOTE: HP continually improves and changes product parts. For complete and current information about supported parts for your computer, go to <a href="https://partsurfer.hp.com/">https://partsurfer.hp.com/</a>, select your country or region, and then follow the on-screen instructions.

Make special note of each screw size and location during removal and replacement.

## Solid-state drive, primary

To remove the primary solid-state drive (SSD), use this procedure and illustration.

Table 6-1 SSD descriptions and part numbers


Description	Spare part number
2TB	P07215-005
1TB	N77394-005
512 GB	N77392-005

Before removing the primary SSD, follow these steps:


- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see <a href="Bottom cover on page 33">Bottom cover on page 33</a>).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

Remove the SSD:

1. Locate the primary SSD (2).

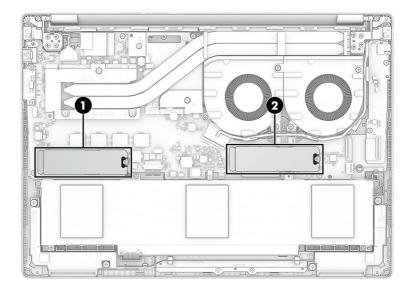


- 2. Remove Phillips M2.0  $\times$  3.0 screw (1) that secures the SSD cover.
- 3. Pull the cover with SSD (2) out of the socket.

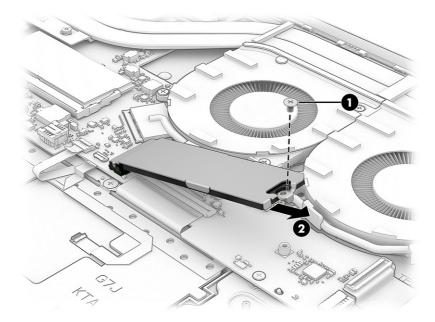

To install an SSD, reverse the removal procedures.

When installing an SSD, be sure a thermal pad is installed on the bottom of the SSD cover.

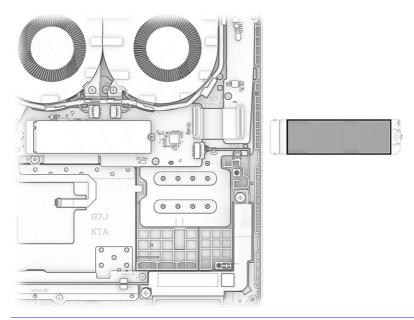

NOTE: SSDs are designed with a notch to prevent incorrect insertion.

## Memory modules (select products only)

To remove the memory modules, use this procedure and illustration.

Table 6-2 Memory module descriptions and part numbers


Description	Spare part number
16 GB	N77399-005
12 GB	P33447-005
8 GB	N77398-005

Before removing the memory, follow these steps:


- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

If you are replacing a memory module, remove the existing memory module:

1. Remove the protective cover from the memory modules.

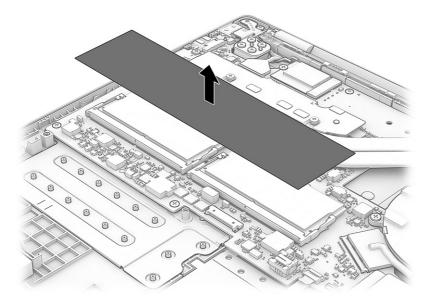

- 2. Spread the two retention clips outward (1) until the memory module tilts up at a 45° angle, and then remove the module (2). Use the same procedure to remove all memory modules.
- **IMPORTANT:** To prevent damage to the memory module, hold the memory module by the edges only. Do not touch the components on the memory module.

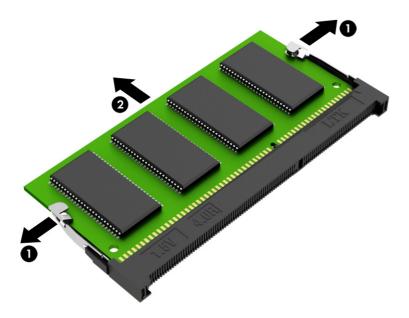


To protect a memory module after removal, place it in an electrostatic-safe container.

To install a memory module:

1. Align the notched edge of the module with the tab in the slot (1), and then press the module into the slot at an angle until it is seated (2).

2. Press down on the module until the side retention clips snap into place (3).

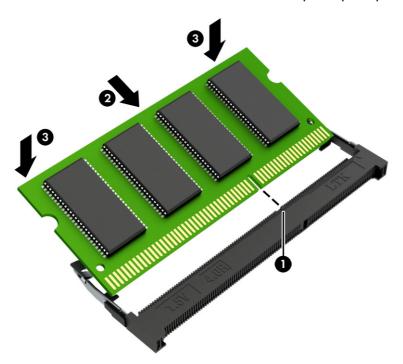

3. Replace the memory cover.

## **WLAN** module

To remove the WLAN module, use this procedure and illustration.

Table 6-3 WLAN module descriptions and part numbers

Description	Spare part number
Intel AX211 Wi-Fi 6E Bluetooth 5.3	M53366-005
Intel BE201 Wi-Fi 7 Bluetooth 5.4	N86466-005
MediaTek MT7925 Wi-Fi 7 + Bluetooth 5.4	N64647-005


IMPORTANT: To prevent an unresponsive system, replace the wireless module only with a wireless module authorized for use in the computer by the governmental agency that regulates wireless devices in your country or region. If you replace the module and then receive a warning message, remove the module to restore device functionality, and then contact technical support.

Before removing the WLAN module, follow these steps:


- 1. Prepare the computer for disassembly (Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

Remove the WLAN module:

- 1. Remove the antenna protector (1) from the module.
- 2. Disconnect the antenna cables (2) from the module terminals.
- 3. Remove the Phillips M2.0  $\times$  3.0 screw (3) that secures from the WLAN module.
- 4. Remove the module (4) by pulling it away from the slot at an angle.

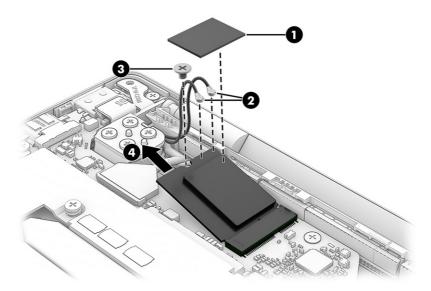

5. If the WLAN antenna is not connected to the terminal on the WLAN module, install a protective sleeve on the antenna connector, as shown in the following illustration.

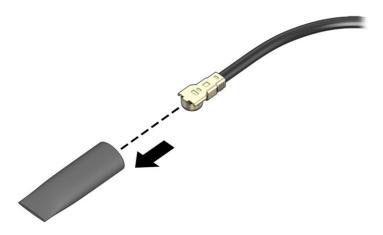

To install the WLAN module, reverse this procedure.

NOTE: WLAN modules are notched to prevent incorrect installation.

## **Touchpad**

To remove the touchpad, use this procedure and illustration.

Table 6-4 Touchpad descriptions and part numbers


Description	Spare part number
Glacier silver	P36142-001
Meteor silver	P36143-001

#### Before removing the touchpad, follow these steps:

- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Remove the battery (see Removing and reinstalling the same battery on page 36).


#### Remove the touchpad:

- 1. Remove the four Phillips M2.0 × 3.0 screws (1) from the touchpad bracket.
- 2. Remove the bracket (2) from the computer.

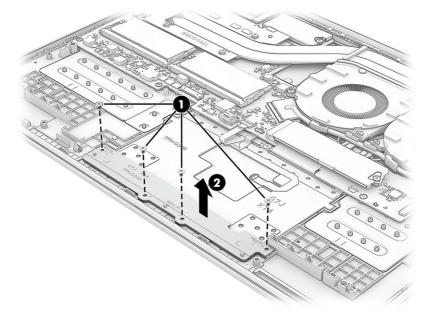

- 3. Peel the clear plastic (1) off the top of the touchpad.
- 4. Remove the conductive tape (2) that secures the touchpad to the computer.
- 5. Disconnect the cable from the ZIF connector (3) on the touchpad.
- 6. Loosen the three Phillips  $M2.0 \times 2.0$  screws (4) from the touchpad. The screws remain connected to the touchpad.

7. Remove the touchpad (5) with the three screws from the computer.

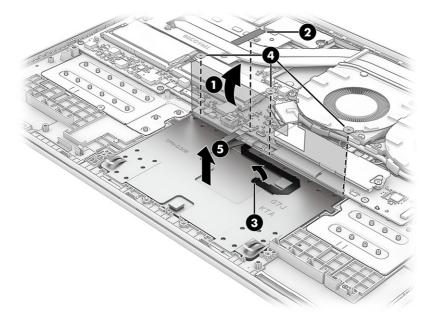

To install the touchpad, reverse the removal procedures.

## **Speakers**

To remove the speakers, use this procedure and illustration.

Table 6-5 Speaker description and part number

Description	Spare part number
Speakers (left and right)	P36141-001


Before removing the speakers, follow these steps:

- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

#### Remove the speakers:

- 1. Disconnect the speaker cable (1) from the system board.
- 2. Remove the four Phillips M1.6 × 2.5 screws (2) that secure the speakers.
- 3. Remove the speaker cable from the clips (3) along the bottom of the computer.

4. Remove the speakers (4) from the computer.

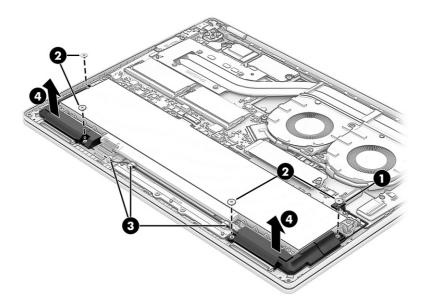

To install the speakers, reverse this procedure.

## **Fans**

To remove the fans, use this procedure and illustration.

Table 6-6 Fans description and part number

Description	Spare part number
Fans	P36133-001


Before removing the fans, follow these steps:

- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

#### Remove the fans:

- 1. Remove the display cable (1) from the clips along the right side and bottom of the fans.
- 2. Disconnect the fan cables (2) from the system board.
- 3. Remove the five Phillips M2.0 × 4.5 screws (3) from the fans.

#### 4. Lift the fans (4) out of the computer.

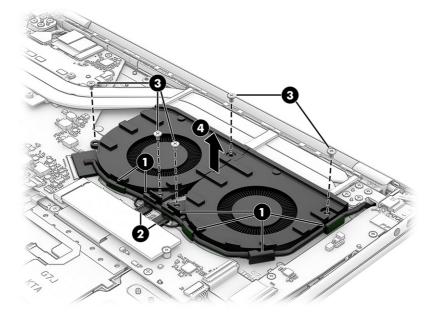

To install the fans, reverse this procedure.

## I/O board

To remove the I/O board, use this procedure and illustration.

Table 6-7 I/O board description and part number


Description	Spare part number
I/O board (includes cable)	P36137-001

Before removing the I/O board, follow these steps:


- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

Remove the I/O board:

1. Remove the four Phillips 2.5 × 5.0 screws (1) from the right hinge, and then lift the hinge (2) off the board.

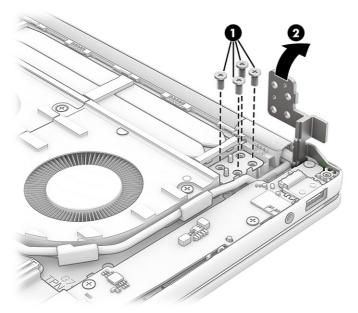


- 2. Lift the tape (1) off the connector on the I/O board.
- 3. Disconnect the cable from the ZIF connector (2) on the board.
- 4. Remove the three Phillips M2.0 × 3.0 screws (3) from the board.
- 5. Lift the back of the board (4) up, and then pull the board (5) into the computer to remove it.

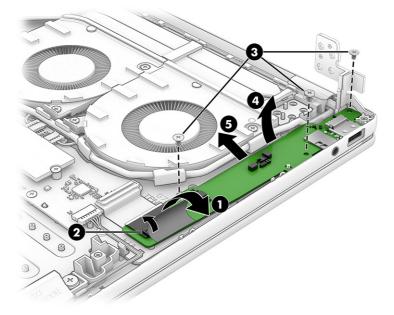

To install the I/O board, reverse this procedure.

When installing an I/O board, be sure to insert the audio connector into the hole (1) in the side of the computer, and then rotate the board (2) into place. Reinstall the screws and connect the cables.

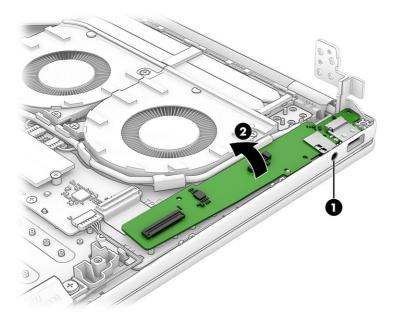

## **Heat sink**

To remove the heat sink, use these procedures and illustrations.

Table 6-8 Heat sink descriptions and part numbers


Description	Spare part number
Models with discrete graphics	P36134-001
Models with integrated UMA graphics	P36135-001

#### Before removing the heat sink, follow these steps:


- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).

#### Remove the heat sink from models with discrete graphics:

- 1. In the order shown on the heat sink, loosen the seven captive Phillips screws (1) on the heat sink.
- 2. Remove the heat sink (2).

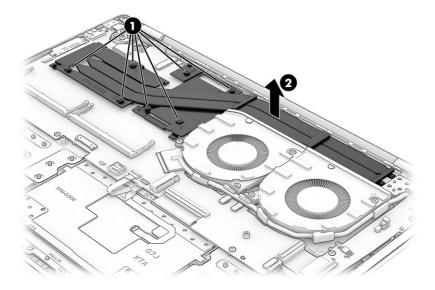


3. Thoroughly clean and replace the gray thermal paste (1) and confirm installation of the thermal pads (2) on the heat sink each time the heat sink is removed.

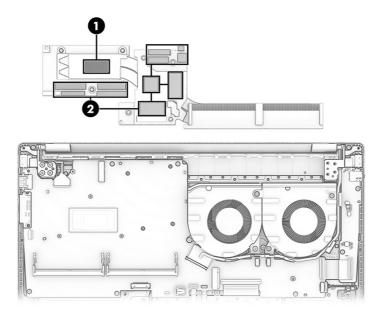

## Remove the heat sink from models with **UMA graphics**:


1. In the order shown on the heat sink, loosen the four captive Phillips screws (1) on the heat sink.

#### 2. Remove the heat sink (2).

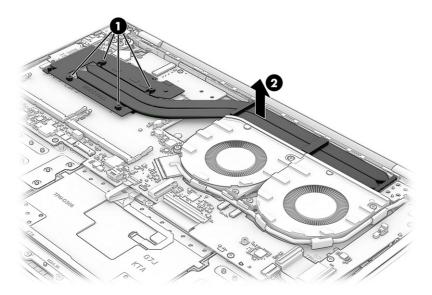

3. Thoroughly clean and replace the gray thermal paste (1) and confirm installation of the thermal pads (2) on the heat sink each time the heat sink is removed.

Each time the heat sink is removed, thoroughly clean and replace the gray thermal grease and white thermal grease from the surface of the heat sink and system board. Remember to reapply on the heat sink, instead of system board. Thoroughly clean the gray and white grease from system boards that you plan to recycle, because the gray grease will no longer be in a sealed space, and the white grease hardens over time, making it difficult to remove during onboard device replacement.

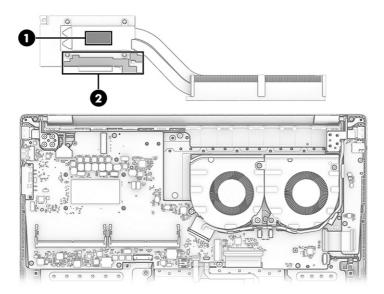

To install the heat sink, reverse this procedure.

## System board

To remove the system board, use these procedures and illustrations.

Table 6-9 System board descriptions and part numbers


Description	Spare part number
System board (includes processor)	P36163-601
Intel Core 9 270H processor	P36149-601
Intel Core 7 240H processor	P36151-601
Intel Core 5 220H processor	P36150-601
Intel Core 5 210H processor	P36152-601
Intel Core Ultra 7 255H processor	P36146-601
Intel Core Ultra 7 255H processor (for use in the PRC)	P36153-601
Intel Core Ultra 5 225H processor	P36147-601
Intel Core Ultra 5 225H processor (for use in the PRC)	P36154-601
Intel Core Ultra 7 255H processor and NVIDIA GeForce RTX 4050 graphics	P36148-601

Before removing the system board, follow these steps:


- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Remove the battery (see Removing and reinstalling the same battery on page 36).
- 4. Remove the solid-state drive (see Solid-state drive, primary on page 47).
- 5. Remove the memory modules (see Memory modules (select products only) on page 49).
- 6. Remove the WLAN module (see WLAN module on page 51).

Remove the system board:


1. Remove the four Phillips  $2.5 \times 5.0$  screws (1) from the left hinge, and then lift the hinge (2) off the board.

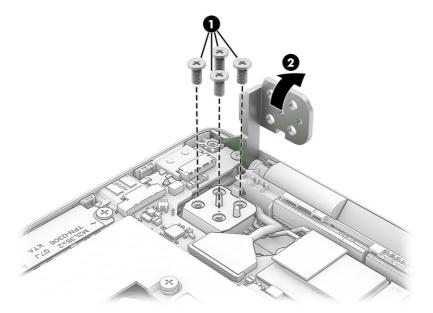

- 2. Disconnect the following cables from the system board:
- NOTE: Some connectors are covered by transparent tape.
  - Camera cable (1)
  - I/O board cable (ZIF) (2)
  - Speaker cable (3)
  - Keyboard cable (ZIF) (4)
  - Touchpad cable (ZIF) (5)
  - Keyboard backlight cable (ZIF) (6)
  - Display cable (7)

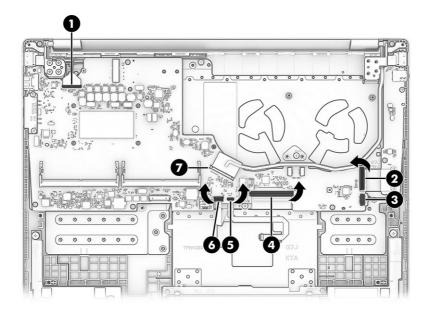


3. Remove the eight Phillips M2.0  $\times$  3.0 screws from the system board.

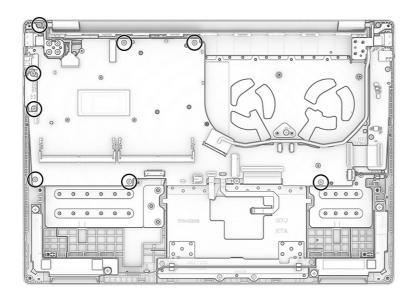


4. Lift the inside of the system board (1) up at an angle.

5. Pull the system board (2) up and into the computer to remove it.

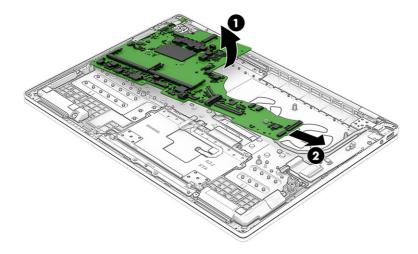


6. If you are replacing the system board, remove the USB bracket from the old system board and install it on the new system board.

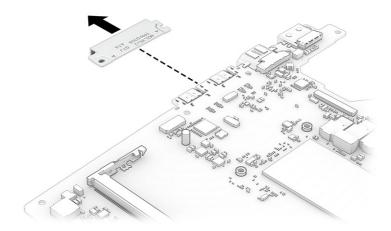

To install a system board, reverse this procedure.

When installing a system board, first insert the top left of the board (1) into the computer, and then rotate the board (2) down into place.

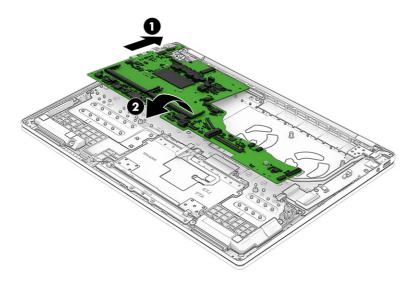

## Display assembly

To remove and disassemble the display assembly, use these procedures and illustrations.

NOTE: The display assembly is only available as spare parts at the subcomponent level. For display assembly spare part information, see the individual removal subsections.


Before removing the display panel, follow these steps:

- 1. Prepare the computer for disassembly (see Preparation for disassembly on page 33).
- 2. Remove the bottom cover (see Bottom cover on page 33).
- 3. Disconnect the battery cable from the system board (see Removing and reinstalling the same battery on page 36).


Remove the display assembly:

- 1. Remove the plastic antenna protector (1) from the WLAN module.
- 2. Disconnect the antenna cables (2) from the WLAN module.
- 3. Remove the tape (3) that secures the cables to the computer.


4. Disconnect the camera cable (4) from the system board.

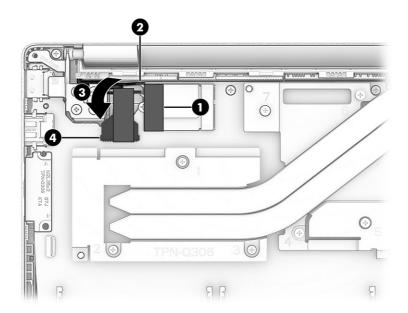


- 5. Lift the tape (1) off the display connector.
- 6. Disconnect the display cable (2) from the system board.
- 7. Remove the display cable from the clips (3) around the fans.

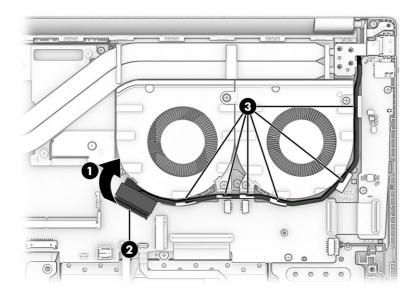


8. Remove the eight Phillips M2.5  $\times$  5.0 screws that secure the display assembly to the computer.

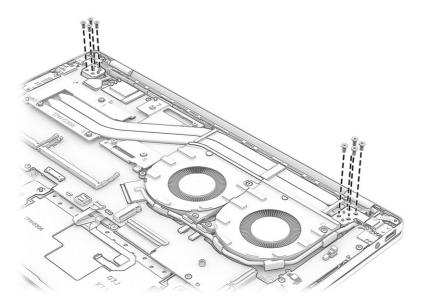

- 9. Open the display (1).
- 10. Separate the display (2) from the computer.

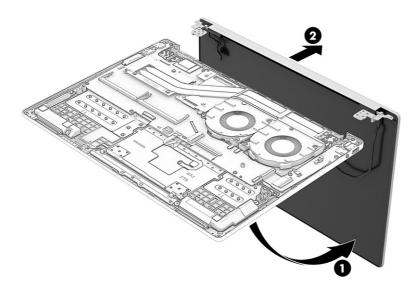


- 11. To remove the display bezel from nontouch displays:
  - a. Remove the bezel from the top, left, and right sides of the display.
  - IMPORTANT: To avoid damage to the panel, do not use a tool on the inside of the bezel. You can use a tool only when you insert it from the outside of the top, left, and right sides of the bezel. Use your fingers to lift up on the bezel. Avoid pressing down on the panel during removal.

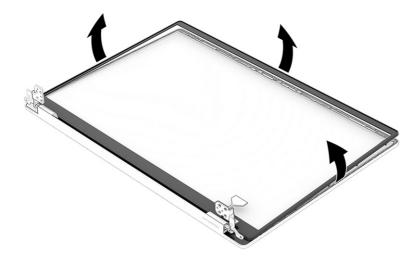

- b. Use tweezers to reach under the left bottom of the bezel and pull out the adhesive (1).
- c. Pull the adhesive (2) across the length of the bottom of the bezel.
- d. Lift the bezel (3) off the display.


Display bezels are available as spare part number P36129-001 for glacier silver models and P36130-001 for meteor silver models.

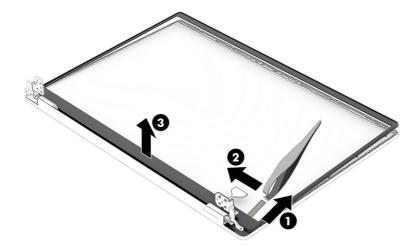


#### 12. To remove the display panel:

- a. Place suction cups (1) in the middle below the camera on both sides of display panel and rear cover.
- b. Pull the suction cups (2) away from each other to flex the panel away from the cover.

c. Use a tool (3) to separate the edges of the cover from the panel.




- d. Place suction cups (1) on the top left side of display panel and rear cover.
- e. Pull the suction cups (2) away from each other to flex the panel away from the cover.
- f. Use a tool (3) to separate the edges of the cover from the panel.
- g. Use tweezers (4) to grasp the hole in the tape, and then pull the tape (5) out from behind the panel.

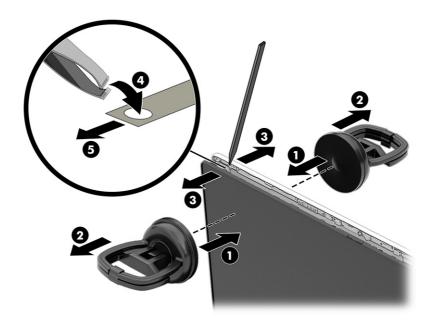


- h. Place suction cups (1) on the top right side of display panel and rear cover.
- i. Pull the suction cups (2) away from each other to flex the panel away from the cover.
- j. Use a tool (3) to separate to edges of the cover from the panel.

k. Use tweezers (4) to grasp the hole in the tape, and then pull the tape (5) out from behind the panel.

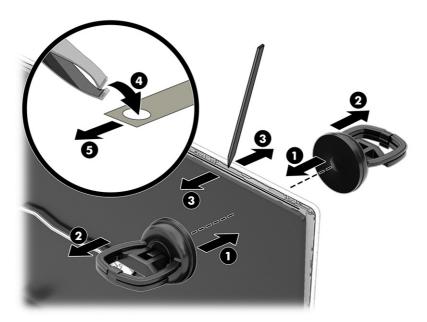


- I. Use a tool (1) to release both hinge covers.
- m. Insert a tool (2) into the seam at the bottom of the panel, and then pull the tool (3) across the bottom of the panel to release the panel.

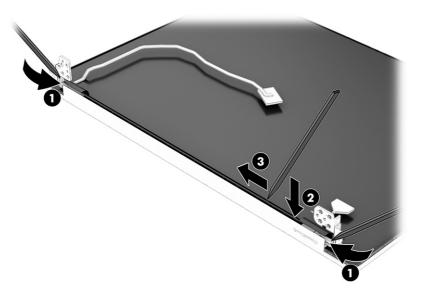


n. Lift the panel off the display rear cover.

Touch display panels are available as spare part number P36155-001 for glacier silver models and P36156-001 for meteor silver models.

Nontouch panels are available as spare part number P36157-001 for WUXGA models and P36158-001 for 2.5 K models.

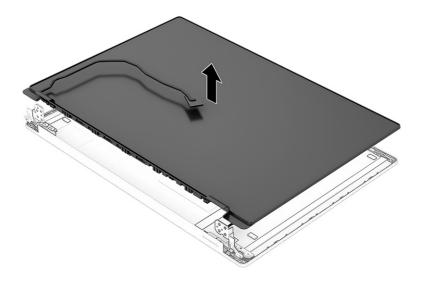


**o.** When installing a display panel, use the following illustration to determine tape installation locations on the inside of the display rear cover.

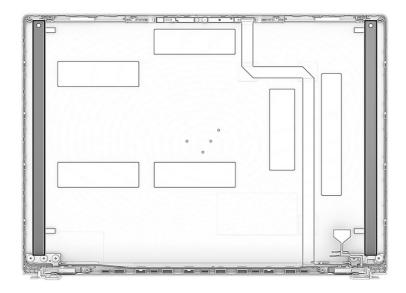

- 13. To remove the display cable from nontouch displays:
  - a. Peel the conductive tape (1) off the connector on the bottom of the panel.


b. Open the locking bar (2), and then disconnect the cable (3) from the panel.

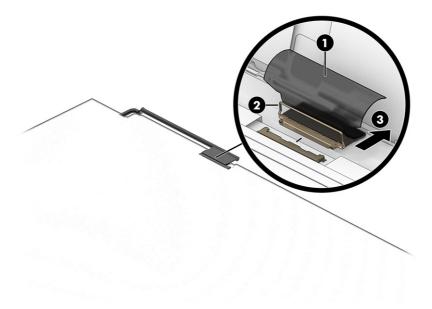

#### 14. To remove the camera module:

- a. Disconnect the cable from the reverse ZIF connector (1) on the camera module.
- b. Starting under the connector, insert a pry tool (2) under the camera module, and then pull the tool across the length of the module (3) to release it.

The camera module is available as spare part number P36144-001 for use in touch models and P36145-001 for use in nontouch models.

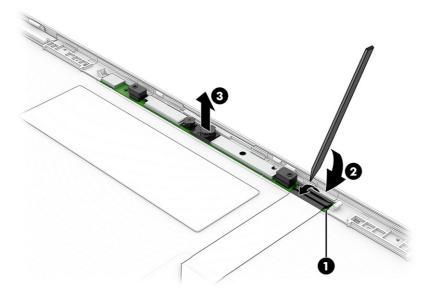


#### MPORTANT: Camera data rewrite process

To protect sensitive data, Microsoft requires implementation of Enhanced Sign-in Security (ESS) in camera modules in HP Next Gen Al PCs. After replacing the camera module, be sure

to reload the camera firmware hash, which requires unlocking Manufacturer Programming Mode (MPM). For more information, go to <a href="https://px.ncm/support">hp.com/support</a> and search for the following term: Camera with Enhanced Sign-in Security feature.


- 15. To remove the hinges from the display rear cover:
  - **a.** Remove the three Phillips  $M2.5 \times 2.5$  screws (1) from each hinge.
  - b. Remove the Phillips M2.5 × 3.5 screw (2) from each hinge.
  - c. Remove the hinges (3) from the display back cover.

The display hinges are available as spare part number P36136-001.

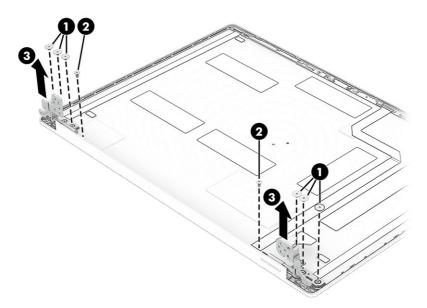


- **16.** To remove the camera cable:
  - a. Peel the cable (1) off the inside of the display rear cover.
  - **b.** Disconnect the cable from the reverse ZIF connector **(2)** on the camera module.

The camera cable is available in the Cable Kit as spare part number P36131-001.

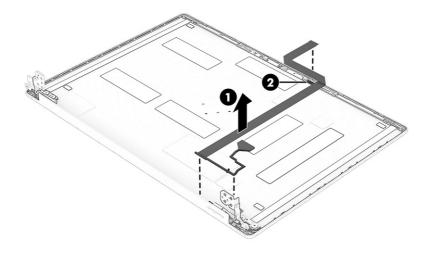


c. Note the alignment marks when installing a camera cable.

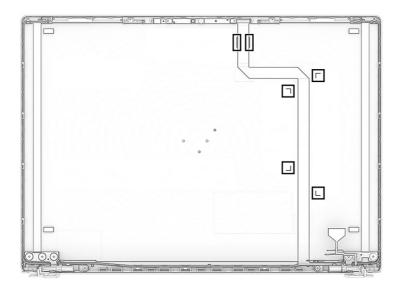


- 17. To remove the wireless antennas and cables:
  - a. Remove the antenna cables (1) from the sides of the display rear cover.
  - b. Peel the antennas (2) off the display rear cover.


The wireless cables and antennas are available in the Cable Kit as spare part number P36131-001. The wireless cables and antennas are also included in the display rear cover spare part kit.

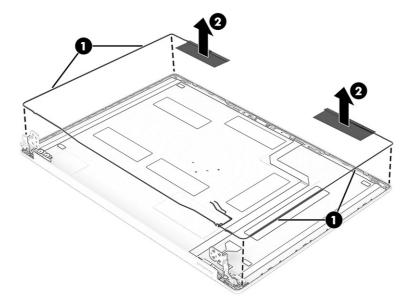


- **18.** To remove the display cable from touch screen displays:
  - a. Peel the conductive tape (1) and clear tape (2) off the connector on the bottom of the panel.
  - Den the locking bar (3), and then disconnect the cable (4) from the panel.
     The display cable is available as spare part number P36132-001.

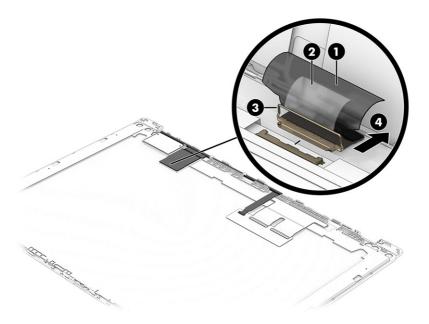

- 19. To remove the display power board and cable from touch screen displays:
  - **a.** After disconnecting the display cable, lift the power board **(1)** off the panel.
  - b. Remove the cable from the clips (2) on the bottom of the panel.
  - Disconnect the cable from the ZIF connector (3) on the touch board.
     The display cable is available as spare part number P36132-001.

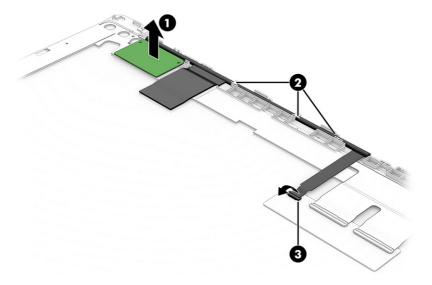


- d. When installing and connecting the display cable for touch screen models, use the following illustration to identify display cable connectors
  - (1): System board
  - (2): Power board
  - (3): Display panel
  - (4): Touch control board

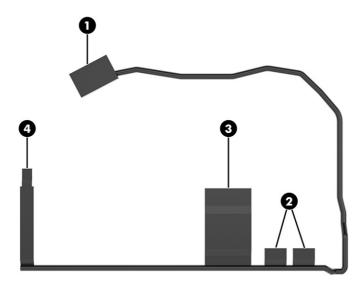

- 20. To remove the OLED power board from touch screen models:
  - a. Lift the power board (1) up enough to access connector underneath.
  - b. Lift up the RF tape (2) enough to disconnect the cables.


c. Disconnect the cables (3) from the power board.

The OLED power board is available as spare part number P36138-001.

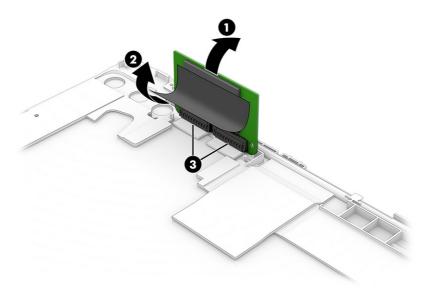

- 21. To remove the touch control board from touch screen models:
  - a. Remove the protective tape (1) from the board.
  - b. Disconnect the cable from the small ZIF connector (2) on the touch board.
  - c. Disconnect the cable from the two wide ZIF connectors (3) on the touch board.
  - d. Remove the board (4).

The touch control board is available as spare part number P36139-001.

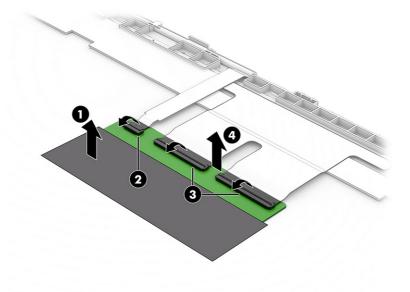

To reassemble and replace the display assembly, reverse these procedures.

#### Top cover with keyboard

The top cover remains after removing all other spare parts from the computer. The first table includes the top cover spare part numbers. The second table includes keyboard country codes.

Table 6-10 Top cover with keyboard descriptions and part numbers

Description	Spare part number
Glacier silver models with an Intel Core Ultra processor	P36159-xx1
Meteor silver models with an Intel Core Ultra processor	P36160-xx1
Glacier silver models with an Intel Core processor	P39032-xx1
Meteor silver models with an Intel Core processor	P39033-xx1

Table 6-11 Spare part country codes

For use in country or region	Spare part number
Belgium	-A41
Czech Republic/Slovakia	-FL1
Denmark, Finland, and Norway	-DH1
French Canada	-DB1
France	-051
Germany	-041
Greece	-151
Israel	-BB1
Italy	-061
Japan	-291
Latin America	-161
The Netherlands	-B31
Russia	-251
Saudi Arabia	-171
Slovenia	-BA1
South Korea	-AD1
Spain	-071
Switzerland	-BG1
Taiwan	-AB1
Thailand	-281
Turkey	-141
Ukraine	-BD1
United Kingdom	-031
United States	-001

### 7 Backing up, restoring, and recovering

You can use Windows tools or HP software to back up your information, create a restore point, reset your computer, create recovery media, or restore your computer to its factory state. Performing these standard procedures can return your computer to a working state faster.


- IMPORTANT: If you are performing recovery procedures on a tablet, the tablet battery must be at least 70% charged before you start the recovery process.
- IMPORTANT: For a tablet with a detachable keyboard, connect the tablet to the keyboard base before beginning any recovery process.

#### Backing up information and creating recovery media

These methods of creating recovery media and backups are available on select products only.

#### Using Windows tools for backing up

HP recommends that you back up your information immediately after initial setup. You can do this task either using Windows Backup locally with an external USB flash drive or using online tools.



### Using the HP Cloud Recovery Download Tool to create a recovery USB flash drive (select products only)

You can use the HP Cloud Recovery Download Tool to create an HP Recovery bootable USB flash drive.

#### For details:

- Go to <a href="http://www.hp.com">http://www.hp.com</a>, search for HP Cloud Recovery, and then select the result that matches the type of computer that you have and follow the on-screen instructions.
- NOTE: In select countries, if you cannot create the HP Recovery USB flash drive yourself, contact support. Go to <a href="http://www.hp.com/support">http://www.hp.com/support</a>, select your country or region, and then follow the on-screen instructions.
- IMPORTANT: HP recommends that you follow the Restoring and recovery methods on page 80 to restore your computer before you obtain and use the HP USB flash drive. Using a recent backup can return your machine to a working state sooner than using the HP USB flash drive. After the system is restored, reinstalling all the operating system software released since your initial purchase can be a lengthy process.

#### Restoring and recovering your system

You have several tools available to recover your system both within and outside of Windows if the desktop cannot load.

HP recommends that you attempt to restore your system using the <u>Restoring and recovery methods on page 80.</u>

#### Creating a system restore

System Restore is available in Windows. The System Restore software can automatically or manually create restore points, or snapshots, of the system files and settings on the computer at a particular point.

When you use System Restore, it returns your computer to its state at the time you made the restore point. Your personal files and documents should not be affected.

#### Restoring and recovery methods

After you run the first method, test to see whether the issue still exists before you proceed to the next method, which might now be unnecessary.

- Run a Microsoft System Restore.
- Run Reset this PC.
- NOTE: The options Remove everything and then Fully clean the drive can take several hours to complete and leave no information on your computer. It is the safest way to reset your computer before you recycle it.
- 3. Recover using the HP Recovery USB flash drive. For more information, see Recovering using the HP Recovery USB flash drive on page 80.

For more information about the first two methods, see the Get Help app:

- Select the Start button, select All apps, select the Get Help app, and then enter the task you want to perform.
- NOTE: You must be connected to the internet to access the Get Help app.

#### Recovering using the HP Recovery USB flash drive

You can use the HP Recovery USB flash drive to recover the operating system and drivers that were installed at the factory. On select products, you can create recovery media on a bootable USB flash drive using the HP Cloud Recovery Download Tool.

For details, see <u>Using the HP Cloud Recovery Download Tool to create a recovery USB flash drive (select products only) on page 79.</u>

NOTE: In select countries, if you cannot create the HP Recovery USB flash drive yourself, contact support. Go to <a href="http://www.hp.com/support">http://www.hp.com/support</a>, select your country or region, and then follow the on-screen instructions.

To recover your system:

- Insert the HP Recovery USB flash drive, and then restart the computer.
- NOTE: HP recommends that you follow the <u>Restoring and recovery methods on page 80</u> to restore your computer before you obtain and use the HP USB flash drive. Using a recent backup can return your machine to a working state sooner than using the HP USB flash drive. After the system is restored, reinstalling all the operating system software released since your initial purchase can be a lengthy process.

#### Changing the computer boot order

If your computer does not restart using the HP Recovery USB flash drive, you can change the computer boot order, which is the order of devices listed in BIOS for startup information.

**IMPORTANT:** For a tablet with a detachable keyboard, connect the tablet to the keyboard base before beginning these steps.

To change the boot order:

- Insert the HP Recovery USB flash drive.
- Access the system Startup menu.
  - For computers or tablets with keyboards attached, turn on or restart the computer or tablet, quickly press esc, and then press f9 for boot options.
  - For tablets without keyboards, turn on or restart the tablet, and then quickly press and hold one
    of the following buttons:
    - Volume up
    - Volume down

Then select f9.

3. Select the USB flash drive to boot from, and then follow the on-screen instructions.

#### Using HP Sure Recover (select products only)

Select computer models are configured with HP Sure Recover, a PC operating system (OS) recovery solution built into the hardware and software. HP Sure Recover can fully restore the HP OS image without installed recovery software.

Using HP Sure Recover, an administrator or user can restore the system and install:

- Latest version of the operating system
- Platform-specific device drivers
- Software applications, in the case of a custom image

To access the latest documentation for HP Sure Recover, go to <a href="http://www.hp.com/support">http://www.hp.com/support</a>. Follow the on-screen instructions to find your product and locate your documentation.

### 8 Using Setup Utility (BIOS)

Setup Utility, or Basic Input/Output System (BIOS), controls communication between all the input and output devices on the system (such as disk drives, display, keyboard, mouse, and printer). Setup Utility (BIOS) includes settings for the types of devices installed, the startup sequence of the computer, and the amount of system and extended memory.

NOTE: To start Setup Utility on convertible computers, your computer must be in notebook mode and you must use the keyboard attached to your notebook.

#### Starting Setup Utility (BIOS)

You have several ways to access the Setup Utility (BIOS).

IMPORTANT: Use extreme care when making changes in Setup Utility (BIOS). Errors can prevent the computer from operating properly.

Use one of these options:

- Turn on or restart the computer and quickly press f10.
- Turn on or restart the computer, quickly press esc, and then press f10 when the Start menu is displayed.

#### **Updating Setup Utility (BIOS)**

Updated versions of Setup Utility (BIOS) might be available on the HP website. Most BIOS updates on the HP website are packaged in compressed files called *SoftPaqs*. Some download packages contain a file named Readme.txt, which contains information regarding installing and troubleshooting the file.

#### Determining the BIOS version

To decide whether you need to update Setup Utility (BIOS), first determine the BIOS version on your computer.

To reveal the BIOS version information (also known as *ROM date* and *System BIOS*), use one of these options.

- HP Support Assistant
  - Perform one of these tasks:
    - Select the Search icon in the taskbar, type support in the search box, and then select the HP Support Assistant app.
    - Select the question mark icon in the taskbar.
  - 2. Under My notebook, select Specifications.
- Setup Utility (BIOS)

- 1. Start Setup Utility (BIOS) (see Starting Setup Utility (BIOS) on page 82).
- 2. Select Main, and then make note of the BIOS version.
- 3. Select Exit, select one of the options, and then follow the on-screen instructions.
- In Windows, press ctrl+alt+s.

To check for later BIOS versions, see Preparing for a BIOS update on page 83.

#### Preparing for a BIOS update

Be sure to follow all prerequisites before downloading and installing a BIOS update.

- IMPORTANT: To reduce the risk of damage to the computer or an unsuccessful installation, download and install a BIOS update only when the computer is connected to reliable external power using the HP AC adapter provided with the computer (select products only), a replacement AC adapter provided by HP, or an AC adapter with the power rating specified on the product label. Do not download or install a BIOS update while the computer is running on battery power, docked in an optional docking device, or connected to an optional power source. During the download and installation, follow these instructions:
  - Do not disconnect power from the computer by unplugging the power cord from the AC outlet.
  - Do not shut down the computer or initiate Sleep.
  - Do not insert, remove, connect, or disconnect any device, cable, or cord.
- NOTE: If your computer is connected to a network, consult the network administrator before installing any software updates, especially system BIOS updates.

#### Downloading a BIOS update

After you review the prerequisites, you can check for and download BIOS updates.

- Perform one of these tasks:
  - Select the Search icon in the taskbar, type support in the search box, and then select the HP Support Assistant app.
  - Select the question mark icon in the taskbar.
- Select Updates. The Checking for Updates window opens, and Windows checks for updates.
- Follow the on-screen instructions.
- 4. At the download area, follow these steps:
  - a. Identify the most recent BIOS update and compare it to the BIOS version currently installed on your computer. If the update is more recent than your BIOS version, make a note of the date, name, or other identifier. You might need this information to locate the update later, after it has been downloaded to your hard drive.
  - b. Follow the on-screen instructions to download your selection to the hard drive.
    - Make a note of the path to the location on your hard drive where the BIOS update is downloaded. You will need to access this path when you are ready to install the update.

#### Installing a BIOS update

BIOS installation procedures vary. Follow any instructions that appear on the screen after the download is complete. If no instructions appear, follow these steps.

- 1. Select the **Search** icon in the taskbar, type file in the search box, and then select **File Explorer**.
- 2. Select your hard drive designation. The hard drive designation is typically Local Disk (C:).
- 3. Using the hard drive path you recorded earlier, open the folder that contains the update.
- Double-click the file that has an .exe extension (for example, *filename*.exe).
   The BIOS installation begins.
- 5. Complete the installation by following the on-screen instructions.
- NOTE: After a message on the screen reports a successful installation, you can delete the downloaded file from your hard drive.

### 9 Using HP PC Hardware Diagnostics

You can use the HP PC Hardware Diagnostics utility to determine whether your computer hardware is running properly. The three versions are HP PC Hardware Diagnostics Windows, HP PC Hardware Diagnostics UEFI (Unified Extensible Firmware Interface), and (for select products only) Remote HP PC Hardware Diagnostics UEFI, a firmware feature.

# Using HP PC Hardware Diagnostics Windows (select products only)

HP PC Hardware Diagnostics Windows is a Windows-based utility that allows you to run diagnostic tests to determine whether the computer hardware is functioning properly. The tool runs within the Windows operating system to diagnose hardware failures.

If HP PC Hardware Diagnostics Windows is not installed on your computer, you must download and install it. To download HP PC Hardware Diagnostics Windows, see <a href="Downloading HP PC Hardware">Downloading HP PC Hardware</a> <a href="Diagnostics Windows on page 86">Diagnostics Windows on page 86</a>.

#### Using an HP PC Hardware Diagnostics Windows hardware failure ID code

When HP PC Hardware Diagnostics Windows detects a failure that requires hardware replacement, a 24-digit failure ID code is generated for select component tests. For interactive tests, such as keyboard, mouse, or audio and video palette, you must perform troubleshooting steps before you can receive a failure ID.

You have several options after you receive a failure ID:

- Select Next to open the Event Automation Service (EAS) page, where you can log the case.
- Scan the QR code with your mobile device, which takes you to the EAS page, where you can log the
  case
- Select the box next to the 24-digit failure ID to copy your failure code and send it to support.

#### Accessing HP PC Hardware Diagnostics Windows

After HP PC Hardware Diagnostics Windows is installed, you can access it from HP Support Assistant or the Start menu.

#### Accessing HP PC Hardware Diagnostics Windows from HP Support Assistant

After HP PC Hardware Diagnostics Windows is installed, follow these steps to access it from HP Support Assistant:

- Complete one of the following tasks:
  - Select the Search icon in the taskbar, type support in the search box, and then select the HP Support Assistant app.
  - Select the question mark icon in the taskbar.
- Select Fixes & Diagnostics.

- 3. Select Run hardware diagnostics, and then select Launch.
- When the tool opens, select the type of diagnostic test that you want to run, and then follow the on-screen instructions.
- NOTE: To stop a diagnostic test, select Cancel.

#### Accessing HP PC Hardware Diagnostics Windows from the Start menu (select products only)

After HP PC Hardware Diagnostics Windows is installed, follow these steps to access it from the Start menu:

- 1. Select the **Start** button, and then select **All apps**.
- 2. Select HP PC Hardware Diagnostics Windows.
- 3. When the tool opens, select the type of diagnostic test that you want to run, and then follow the on-screen instructions.
- NOTE: To stop a diagnostic test, select Cancel.

#### Downloading HP PC Hardware Diagnostics Windows

The HP PC Hardware Diagnostics Windows downloading instructions are provided in English only. You must use a Windows computer to download this tool because only .exe files are provided.

#### Downloading the latest HP PC Hardware Diagnostics Windows version from HP

To download HP PC Hardware Diagnostics Windows from HP, follow these steps:

- 1. Go to http://www.hp.com/go/techcenter/pcdiags. The HP PC Diagnostics home page is displayed.
- 2. Select **Diagnose PC Hardware issues in Windows**, scroll down to the expanded window that appears, and then select **Download**.
- 3. A pop-up that asks what you want to do with the file opens. Select **Open** or **Save As**. The latest version of the diagnostics tool opens or downloads to the selected location.

#### Downloading the HP PC Hardware Diagnostics Windows from the Microsoft Store

You can download the HP PC Hardware Diagnostics Windows from the Microsoft Store:

- 1. Select the Microsoft Store app on your desktop or select the **Search** icon in the taskbar, and then type Microsoft Store in the search box.
- 2. Type HP PC Hardware Diagnostics Windows in the Microsoft Store search box.
- Follow the on-screen directions.

The tool downloads to the selected location.

### Downloading HP Hardware Diagnostics Windows by product name or number (select products only)

You can download HP PC Hardware Diagnostics Windows by product name or number.

- NOTE: For some products, you might have to download the software to a USB flash drive by using the product name or number.
  - 1. Go to http://www.hp.com/support.
  - Select Software and Drivers, select your type of product, and then enter the product name or number in the search box that is displayed.
  - In the Diagnostics section, select Download, and then follow the on-screen instructions to select the specific Windows diagnostics version to be downloaded to your computer or USB flash drive.

The tool downloads to the selected location.

#### Installing HP PC Hardware Diagnostics Windows

To install HP PC Hardware Diagnostics Windows, navigate to the folder on your computer or the USB flash drive where the .exe file downloaded, double-click the .exe file, and then follow the on-screen instructions.

#### Using HP PC Hardware Diagnostics UEFI

HP PC Hardware Diagnostics Unified Extensible Firmware Interface (UEFI) allows you to run diagnostic tests to determine whether the computer hardware is functioning properly. The tool runs outside the operating system so that it can isolate hardware failures from issues that are caused by the operating system or other software components.

NOTE: For some products, you must use a Windows computer and a USB flash drive to download and create the HP UEFI support environment because only .exe files are provided. For more information, see Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive on page 88.

If your PC does not start in Windows, you can use HP PC Hardware Diagnostics UEFI to diagnose hardware issues.

#### Using an HP PC Hardware Diagnostics UEFI hardware failure ID code

When HP PC Hardware Diagnostics UEFI detects a failure that requires hardware replacement, a 24-digit failure ID code is generated.

For assistance in solving the problem, complete one of these tasks:

- Select Contact HP, accept the HP privacy disclaimer, and then use a mobile device to scan the
  failure ID code that appears on the next screen. The HP Customer Support Service Center
  page appears with your failure ID and product number automatically filled in. Follow the on-screen
  instructions.
- Contact support, and provide the failure ID code.

#### Starting HP PC Hardware Diagnostics UEFI

To start HP PC Hardware Diagnostics UEFI, follow this procedure.

- 1. Turn on or restart the computer, and quickly press esc.
- 2. Press f2.

The BIOS searches three places for the diagnostic tools, in the following order:

- Connected USB flash drive
- NOTE: To download the HP PC Hardware Diagnostics UEFI tool to a USB flash drive, see Downloading the latest HP PC Hardware Diagnostics UEFI version on page 89.
- b. Hard drive
- c. BIOS
- When the diagnostic tool opens, select the type of diagnostic test that you want to run, and then follow the on-screen instructions.

### Starting HP PC Hardware Diagnostics UEFI through HP Hotkey Support software (select products only)

This section describes how to start HP PC Hardware Diagnostics UEFI through HP Hotkey Support software.

NOTE: You must disable fast boot to access HP PC Hardware Diagnostics UEFI from the HP System Information application.

To disable fast boot:

- 1. Turn on or restart the computer, and when the HP logo appears, press f10 to enter Computer Setup.
- 2. Select Advanced, and then select Boot Options.
- 3. Clear Fast Boot.
- 4. Select Save Changes and Exit, and then select Yes.

To start HP PC Hardware Diagnostics UEFI through HP Hotkey Support software, follow this procedure:

- From the Start menu, open the HP System Information Application or press fn+esc.
- 2. In HP System Information screen, select **Run System Diagnostics**, select **Yes** to run the application, and then select **Restart**.
- **IMPORTANT:** To prevent loss of data, save your work in all open apps before restarting your computer.
- NOTE: When the restart is complete, the computer opens the HP PC Hardware Diagnostics UEFI Application. Proceed with the troubleshooting tests.

#### Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive

Downloading HP PC Hardware Diagnostics UEFI to a USB flash drive can be useful in some situations.

- HP PC Hardware Diagnostics UEFI is not included in the preinstallation image.
- HP PC Hardware Diagnostics UEFI is not included in the HP Tool partition.

The hard drive is damaged.

NOTE: The HP PC Hardware Diagnostics UEFI downloading instructions are provided in English only, and you must use a Windows computer to download and create the HP UEFI support environment because only . exe files are provided.

#### Downloading the latest HP PC Hardware Diagnostics UEFI version

To download the latest HP PC Hardware Diagnostics UEFI version to a USB flash drive, follow these steps:

- 1. Go to http://www.hp.com/go/techcenter/pcdiags. The HP PC Diagnostics home page is displayed.
- 2. Select **Diagnose PC Hardware Issues outside of the OS**, scroll down to the expanded window that appears, and then select **Download**.
- 3. A pop-up that asks what you want to do with the file opens. Select **Open** or **Save As**. The latest version of the diagnostics tool opens or downloads to the selected location.

### Downloading HP PC Hardware Diagnostics UEFI by product name or number (select products only)

You can download HP PC Hardware Diagnostics UEFI by product name or number (select products only) to a USB flash drive.

- NOTE: For some products, you might have to download the software to a USB flash drive by using the product name or number.
  - 1. Go to http://www.hp.com/support.
  - Enter the product name or number, select your computer, and then select your operating system.
  - 3. In the **Diagnostics** section, follow the on-screen instructions to select and download the specific UEFI Diagnostics version for your computer.

# Using Remote HP PC Hardware Diagnostics UEFI settings (select products only)

Remote HP PC Hardware Diagnostics UEFI is a firmware (BIOS) feature that downloads HP PC Hardware Diagnostics UEFI to your computer. It can then run the diagnostics on your computer, and it might upload results to a preconfigured server.

For more information about Remote HP PC Hardware Diagnostics UEFI, go to <a href="http://www.hp.com/go/techcenter/pcdiags">http://www.hp.com/go/techcenter/pcdiags</a>, select **Diagnose Other Potential Issues**, scroll down to **Remote PC Hardware Diagnostics UEFI**, and then select **Learn More**.

#### Downloading Remote HP PC Hardware Diagnostics UEFI

Remote HP PC Hardware Diagnostics UEFI is also available as a SoftPaq that you can download to a server.

#### Downloading the latest Remote HP PC Hardware Diagnostics UEFI version

You can download the latest Remote HP PC Hardware Diagnostics UEFI version to a USB flash drive.

1. Go to <a href="http://www.hp.com/go/techcenter/pcdiags">http://www.hp.com/go/techcenter/pcdiags</a>. The HP PC Diagnostics home page is displayed.

- Select Diagnose PC Hardware Issues outside of the OS, scroll down to the expanded window that appears, and then select Download.
- 3. A pop-up that asks what you want to do with the file opens. Select **Open** or **Save As**. The latest version of the diagnostics tool opens or downloads to the selected location.

#### Downloading Remote HP PC Hardware Diagnostics UEFI by product name or number

You can download Remote HP PC Hardware Diagnostics UEFI by product name or number.

- NOTE: For some products, you might have to download the software by using the product name or number.
  - 1. Go to http://www.hp.com/support.
  - 2. Select **Software and Drivers**, select your type of product, enter the product name or number in the search box that is displayed, select your computer, and then select your operating system.
  - In the Diagnostics section, follow the on-screen instructions to select and download the Remote UEFI version for the product.

#### Customizing Remote HP PC Hardware Diagnostics UEFI settings

Using the Remote HP PC Hardware Diagnostics setting in Computer Setup (BIOS), you can perform several customizations.

- Set a schedule for running diagnostics unattended. You can also start diagnostics immediately in interactive mode by selecting Execute Remote HP PC Hardware Diagnostics UEFI.
- Set the location for downloading the diagnostic tools. This feature provides access to the tools
  from the HP website or from a server that has been preconfigured for use. Your computer does
  not require the traditional local storage, such as a hard drive or USB flash drive, to run remote
  diagnostics.
- Set a location for storing the test results. You can also set the user name and password that you use for uploads.
- Display status information about the diagnostics run previously.

To customize Remote HP PC Hardware Diagnostics UEFI settings, follow these steps:

- 1. Turn on or restart the computer, and when the HP logo appears, press f10 to enter Computer Setup.
- 2. Select Advanced, and then select Settings.
- 3. Make your customization selections.
- Select Main, then select Save Changes and Exit to save your settings.

Your changes take effect when the computer restarts.

### 10 Specifications

This chapter provides specifications for your computer system.

#### Computer specifications

This section provides specifications for your computer. When you travel with your computer, the computer dimensions and weights, as well as input power ratings and operating specifications, provide helpful information.

Table 10-1 Computer specifications

···		
	Metric	U.S.
Dimensions		
Width	357.8 mm	14.09 in
Depth	254.9 mm	10.04 in
Height (front)	11.1 mm	0.44 in
Height (rear)	15.1 mm	0.59 in
Height (max)	19.9 mm	0.78 in
Weight	1962.1 g	4.33 lbs
Input power		
Operating voltage and current	5 V DC @ 3 A / 9 V DC @ 3 A / 12 V DC @ 5 A / 15 V DC @ 5 A / 20 V DC @ 5 A / 5 V DC USB-A port @ 2 A - 100 W USB-C + 10 W USB-A	
Temperature		
Operating	<b>5°C to 35°C</b> 41°F to 95°F	
Nonoperating	-20°C to 60°C	-4°F to 140°F
Relative humidity (noncondensing)		
Operating	10% to 90%	
Nonoperating	5% to 95%	
Maximum altitude (unpressurized)		
Operating	<b>-15 m to 3,048 m</b> -50 ft to 10,000 ft	
Nonoperating	-15 m to 12,192 m	-50 ft to 40,000 ft



NOTE: Applicable product safety standards specify thermal limits for plastic surfaces. The device operates well within this range of temperatures.

### **Display specifications**

This section provides specifications for your display.

Table 10-2 Display specifications

	Metric	U.S.
Active diagonal size	40.6 cm	16.0 in
Resolution	2048 × 1280 (2 K)	
	2560 × 1600 (2.5 K)	
	1920 × 1200 (WUXGA)	
Surface treatment	BrightView (2 K)	
	Antiglare (2.5 K, WUXGA)	
Brightness	300 nits (WUXGA)	
	400 nits (2 K)	
	500 nits (2.5 K)	
Viewing angle	UWVA	
Backlight	OLED	
	LED	
Display panel interface	eDP	

### Solid-state drive specifications

This section provides specifications for your SSDs.

Table 10-3 SSD specifications

	1TB*	2 TB*
Dimensions		
Height	1.0 mm	1.0 mm
Length	80 mm	80 mm
Width	22 mm	22 mm
Weight	<10 g	< 10 g
Interface type	PCle	PCle
Ready time, maximum (to not busy)	<1.0 ms	< 1.0 ms
Access times, logical	0.1 ms	0.1 ms
Transfer rate		
Sequential read	Up to 300,000 IOPs	Up to 300,000 IOPs
Random read	Up to 300,000 IOPs	Up to 300,000 IOPs
Sequential write	up to 1550 MBps	up to 2500 MBps

Table 10-3 SSD specifications (continued)

	1TB*	2 TB*
Random write	Up to 100,000 IOPs	Up to 125,000 IOPs
Total logical sectors	1,500,336,388	2,985,523,121
Operating temperature	<b>0°C to 70°C</b> (32°F to 158°F)	<b>0°C to 70°C</b> (32°F to 158°F)

\*Actual accessible capacity is less. Actual drive specifications might differ slightly.



NOTE: Certain restrictions and exclusions apply. Contact support for details.

### 11 Power cord set requirements

This chapter provides power cord requirements for countries and regions.

The wide-range input feature of the computer permits it to operate from any line voltage from 100 V AC to 120 V AC, or from 220 V AC to 240 V AC.

The three-conductor power cord set included with the computer meets the requirements for use in the country or region where the equipment is purchased.

Power cord sets for use in other countries or regions must meet the requirements of the country and region where the computer is used.

#### Requirements for all countries

These power cord requirements are applicable to all countries and regions.

- The length of the power cord set must be at least 1.0 m (3.3 ft) and no more than 2.0 m (6.5 ft).
- All power cord sets must be approved by an acceptable accredited agency responsible for evaluation in the country or region where the power cord set will be used.
- The power cord sets must have a minimum current capacity of 10 A and a nominal voltage rating of 125 V AC or 250 V AC, as required by the power system of each country or region.
- The appliance coupler must meet the mechanical configuration of an EN 60 320/IEC 320 Standard Sheet C13 connector for mating with the appliance inlet on the back of the computer.

#### Requirements for specific countries and regions

To determine power cord requirements for specific countries and regions, use this table.


Table 11-1 Power cord requirements for specific countries and regions

Country/region	Accredited agency	Applicable note number
Argentina	IRAM	1
Australia	SAA	1
Austria	OVE	1
Belgium	CEBEC	1
Brazil	ABNT	1
Canada	CSA	2
Chile	IMQ	1
Denmark	DEMKO	1
Finland	FIMKO	1
France	UTE	1

Table 11-1 Power cord requirements for specific countries and regions (continued)

Country/region	Accredited agency	Applicable note number
Germany	VDE	1
India	BIS	1
Israel	SII	1
Italy	IMQ	1
Japan	JIS	3
Netherlands	KEMA	1
New Zealand	SANZ	1
Norway	NEMKO	1
PRC	CCC	4
Saudi Arabia	SASO	7
Singapore	PSB	1
South Africa	SABS	1
South Korea	KTL	5
Sweden	SEMKO	1
Switzerland	SEV	1
Taiwan	BSMI	6
Thailand	TISI	1
United Kingdom	ASTA	1
United States	UL	2

- 1. The flexible cord must be Type HO5VV-F, three-conductor, 0.75 mm<sup>2</sup> conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the certification mark of the agency responsible for evaluation in the country or region where it will be used.
- 2. The flexible cord must be Type SVT/SJT or equivalent, No. 18 AWG, three-conductor. The wall plug must be a two-pole grounding type with a NEMA 5-15P (15 A, 125 V AC) or NEMA 6-15P (15 A, 250 V AC) configuration. CSA or C-UL mark. UL file number must be on each element.
- 3. The appliance coupler, flexible cord, and wall plug must bear a T mark and registration number in accordance with the Japanese Dentori Law. The flexible cord must be Type VCTF, three-conductor, 0.75 mm² or 1.25 mm² conductor size. The wall plug must be a two-pole grounding type with a Japanese Industrial Standard C8303 (7 A, 125 V AC) configuration.
- 4. The flexible cord must be Type RVV, three-conductor, 0.75 mm<sup>2</sup> conductor size. Power cord set fittings (appliance coupler and wall plug) must bear the CCC certification mark.
- 5. The flexible cord must be Type H05VV-F three-conductor, 0.75 mm² conductor size. KTL logo and individual approval number must be on each element. Approval number and logo must be printed on a flag label.
- 6. The flexible cord must be Type HVCTF three-conductor, 1.25 mm<sup>2</sup> conductor size. Power cord set fittings (appliance coupler, cable, and wall plug) must bear the BSMI certification mark.

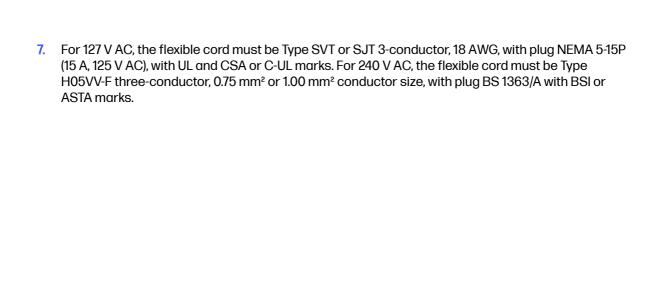

# 12 Swelling or deformation of notebook battery

To protect your hardware from potential damage, HP recommends that if you are experiencing battery swelling, stop using the notebook until you can replace the battery.

You can contact HP to understand what battery replacement options are available. To learn more about Lithium-ion batteries and the factors that can accelerate battery swelling, see <a href="https://support.hp.com/us-en/document/ish-6824662-6824706-16">https://support.hp.com/us-en/document/ish-6824662-6824706-16</a>.

#### Swollen notebook batteries

You might notice that your notebook battery has become somewhat deformed or swollen over time. In some cases, the battery swelling might be significant enough to impact other components of the system including the touchpad, keyboard, and chassis.

#### Swollen battery is not a safety issue

A swollen battery does not present a safety issue. It is the result of the generation of gases per the normal degradation of the battery cell over time.

HP has worked closely with our battery cell suppliers and third-party industry experts to help minimize the potential for HP batteries to swell over time and to identify that swollen batteries are not a safety issue.

#### Discontinue using a swollen battery

To protect your hardware from potential damage, HP recommends that, if you are experiencing battery swelling, you stop using the notebook until the battery can be replaced.

You can contact <a href="https://www.hp.com/go/contacthp">https://www.hp.com/go/contacthp</a> to understand what battery replacement options are available.

#### Replace a swollen battery

If a battery is under warranty, HP will replace the battery per the terms and conditions of the HP Worldwide Limited Warranty or applicable HP Care Packs.

For batteries no longer under warranty, contact HP to purchase a genuine HP replacement battery.

#### Minimize battery swelling

Multiple factors can accelerate battery swelling.

To help mitigate battery swelling over time, you can use either HP Adaptive Battery Optimizer (consumer notebooks) or HP Battery Health Manager (commercial notebooks) settings to improve battery longevity and performance for various use scenarios.

#### **HP Adaptive Battery Optimizer (consumer notebooks)**

HP Adaptive Battery Optimizer technology can help mitigate the factors that cause the battery to swell. It is available on select HP OMEN, HP Spectre, HP Pavilion, and HP ENVY notebook computers.

HP Adaptive Battery Optimizer has been available on select gaming notebooks since 2019 and select consumer notebooks since 2020. To learn more about enabling HP Adaptive Battery Optimizer on your HP notebook, see <a href="https://support.hp.com/us-en/document/c06310986">https://support.hp.com/us-en/document/c06310986</a>.

#### HP Battery Health Manager (commercial notebooks)

HP Battery Health Manager provides an easy-to-manage solution to help mitigate factors that cause the battery to swell. It is available on select HP ProBook and HP EliteBook notebook computers.

HP Battery Health Manager is available on select commercial notebooks manufactured since 2016. To learn more about HP Battery Health Manager, see <a href="https://support.hp.com/us-en/document/ish/4449597-3519507-16">https://support.hp.com/us-en/document/ish/4449597-3519507-16</a>.

### 13 Recycling

When a nonrechargeable or rechargeable battery has reached the end of its useful life, do not dispose of the battery in general household waste. Follow the local laws and regulations in your area for battery disposal.

HP encourages customers to recycle used electronic hardware, HP original print cartridges, and rechargeable batteries. For more information about recycling programs, see the HP website at <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a>.

### Index

A	cleaning your computer 28	fn key, identifying 13
AC adapter and battery light,	caring for wood veneer 30	fn lock light, identifying 12
identifying 6	disinfecting 29	
AC adapters, spare part	HP Easy Clean 28	G
numbers 22	removing dirt and debris 28	graphics, product description 1
action key, identifying 13	components	grounding methods 24-26
audio-out (headphone)/audio-in	bottom 14	guidelines
(microphone) combo jack,	display 8	packaging 24, 30
identifying 8	keyboard area 10	transporting 24, 30
audio, product description 3	left side 7	workstation 24
•	lights 11	
В	right side 6	H
hadus execting 70	touchpad 10	hard drive
backup, creating 79	computer major components 16	
backups 79	computer specifications 91	product description 2
battery	connectors	specifications 91
illustrated 17	power 6,7	HDMI port identifyina 7
spare part number 17	control zone 10	identifying 7 heat sink
battery swelling 97 BIOS	D	illustrated 18
	D	removal 58
determining version 82 downloading an update 83, 84	display	spare part number 18
starting the Setup Utility 82	specifications 91, 92	spare part numbers 58
updating 82	display assembly	hinge
Bluetooth label 15	subcomponents 18, 20	illustrated 19, 21
boot order, changing 81	display back cover	spare part number 19, 21
bottom components 14	illustrated 20, 22	HP PC Hardware Diagnostics UEFI
bottom cover	spare part number 20, 22	downloading 88
illustrated 17	display cable	failure ID code 87
removal 33	illustrated 19, 22	HP Hotkey Support
spare part number 17, 33	spare part number 19, 22	software 88
buttons	display components 8	starting 87,88
left touchpad 10, 11	display panel	using 87
right touchpad 10, 11	illustrated 19, 21	HP PC Hardware Diagnostics
right todonpad 10, 11	product description 1	Windows
C	spare part number 19, 21	accessing 85, 86
	_	downloading 86
calculator key, identifying 13	E	failure ID code 85
camera	electrostatic discharge (ESD) 24,	installing 87
identifying 9	25	using 85
illustrated 19, 21	preventing damage 24-26	HP Recovery media
spare part number 19, 21	esc key, identifying 13	recovery 80
camera light, identifying 9 camera privacy cover,	-	HP Sure Recover 81
identifying 9	F	
caps lock light 12	fan	T.
caps lock light 12 caring for your computer 28	illustrated 18	I/O board
cautions	removal 55	illustrated 18
electrostatic discharge 24.25	spare part number 18.55	removal 56

spare part number 18, 56 illustrated parts catalog 16 integrated numeric keypad, identifying 13 internal microphones, identifying 9  J jacks audio-out (headphone)/audio-in (microphone) 8	memory modules removal 49 spare part numbers 49 microphone product description 3 microphone mute light, identifying 12 mute light, identifying 12  N  num lock key, identifying 13 num lock light 12	product description audio 3 display panel 1 graphics 1 hard drive 2 keyboard 4 memory module 2 microphone 3 operating system 4 pointing device 4 ports 3 power requirements 4 primary storage 2
	num lock light, identifying 12	processors 1
keyboard product description 4	0	security 4 serviceability 5
keyboard country codes 78	operating system, product	solid-state drive 2
keypad, integrated numeric 13	description 4	video 3
keys action 13	P	wireless 3
calculator 13		product name and number, computer 15
esc 13	packaging guidelines 24, 30 pointing device, product	
fn 13	description 4	R
num lock 13 power 14	ports	recovery 79
Windows 13	HDMI 7	discs 80
	product description 3 USB 7	media 80 USB flash drive 80
L	USB Type-C power connector	recovery media 79
labels	and port with HP Sleep and	creating using HP Cloud
Bluetooth 15	Charge and DisplayPort	Recovery Download
regulatory 15 serial number 15	output 7 USB Type-C power connector	Tool 79 creating using Windows
service 15	and Thunderbolt port with	tools 79
wireless certification 15	HP Sleep and Charge and	regulatory information
WLAN 15	DisplayPort output 6	regulatory label 15
left control zone, identifying 10 left side components 7	power connector identifying 6,7	wireless certification labels 15
lights	power cord	Remote HP PC Hardware Diagnostics UEFI settings
AC adapter and battery 6	requirements for all	customizing 90
camera 9	countries 94	using 89
caps lock 12 fn lock 12	requirements for specific countries and regions 94	removal and replacement
microphone mute 12	countries and regions 94 set requirements 94	procedures 33, 47 solid-state drive 43, 47
mute 12	power cords, spare part	restoring 79
num lock 12	numbers 22	restoring and recovery
power 12	power key, identifying 14	methods 80
touchpad 10 lights, num lock 12	power light, identifying 12 power requirements, product	right control zone, identifying 10 right side components 6
low blue light mode 8	description 4	right side components o
-	primary storage	S
M	product description 2	Screw Kit, spare part number 22
memory module	processor product description 1	security, product description 4
product description 2	product documentary	serial number, computer 15 service labels, locating 15

serviceability, product description 5 solid-state drive	touchpad zone, identifying 10, 11 transporting guidelines 24, 30 traveling with the computer 15
illustrated 18 product description 2	U
removal and replacement 43 47 spare part number 18 specifications 92 speaker illustrated 17 removal 54 spare part number 17 spare part numbers 54 speakers 14	
special keys	V
identifying 12	vents, identifying 15
using 12 specifications	video, product description 3
computer 91	
display 91, 92	W
hard drive 91	wake-on-voice 8
solid-state drive 92 static electricity 24, 25	Windows
support information 30	backup 79 recovery media 79
swelling or deformation of	system restore point 79
notebook battery 97	Windows key, identifying 13
system board	Windows tools, using 79
illustrated 17 removal 61	wireless antennas
spare part number 17	illustrated 20, 22 spare part number 20, 22
spare part numbers 61	wireless antennas, identifying 9
system restore 80	wireless certification label 15
system restore point, creating	wireless, product description 3
т	WLAN antennas, identifying 9
•	WLAN device 15 WLAN label 15
top cover with keyboard illustrated 17	WLAN module
spare part number 17	illustrated 17
spare part numbers 78	removal 51
touch control board	spare part number 17,51
illustrated 19 spare part number 19	workstation guidelines 24
spare part number 19 touchpad	
illustrated 17	
removal 52	
settings 10	
spare part number 17	
spare part numbers 52	
touchpad buttons	
identifying 10,11 touchpad components 10	
touchpad light, identifying 10	
touchpad settings, adjusting 10	)