Poly Studio G62, Poly G7500, and Poly Studio X Family Privacy Guide

SUMMARY

This guide provides end-users and administrators with information about how the featured product collects, shares, and uses data.

Legal information

Copyright and license

© , HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Trademark credits

All third-party trademarks are the property of their respective owners.

Privacy policy

HP complies with applicable data privacy and protection laws and regulations. HP products and services process customer data in a manner consistent with the HP Privacy Policy. Please refer to HP Privacy Statement.

Open source software used in this product

This product contains open source software. You may receive the open source software from HP up to three (3) years after the distribution date of the applicable product or software at a charge not greater than the cost to HP of shipping or distributing the software to you. To receive software information, as well as the open source software code used in this product, contact HP by email at ipgoopensourceinfo@hp.com.

Table of contents

1 Before You Begin 1
Related Poly and Partner Resources 1
2 Privacy-Related Options 2
Call Detail Report (CDR) 3
Enable the Call Detail Report Feature 3
Configure the Recent Calls List 3
Create Local Administrator Credentials 3
Setting Up a Directory 5
Register with the Polycom Global Directory Server 5
Register with an LDAP Directory Server 5
Managing Contacts and Favorites 6
Types of 6
Manage Contacts 7
Unfavorite a contact 7
Register the System with Poly Clariti Manager Provisioning Service 7
Retrieve Log Files 8
3 Purposes of Processing Personal Data 9
4 How Administrators Are Informed of Any Security Anomalies (Including Data Breaches) 10
5 How Personal Data is Deleted 11
Reset System Settings 11
Factory Restore the System 12
6 Getting help 15
HP Inc. addresses 15
Document information 16

1 Before You Begin

This Privacy Guide provides information regarding the implementation of Privacy by Design for Poly G7500, Poly Studio G62, and Poly Studio X series .

This guide contains details about configurable privacy options and how personal data is processed.

Related Poly and Partner Resources

Poly is now a part of HP. The joining of Poly and HP paves the way for us to create the hybrid work experiences of the future. Information about Poly products is now transitioning from the Poly Support site to the HP Support site.

Visit the following sites for information related to this product.

- HP Support is the entry point to online product, service, and solution support information. Find product-specific information such as **Troubleshooting** information, **Setup & User Guides**, **Product Specifications**, **Warranty & Repair** information, support videos, and knowledge base articles on the product page. You can also download software for desktop and mobile platforms from **Software & Drivers** and access additional services from the **Account & Registration** page.
- The Poly Documentation Library provides support documentation for active products, services, and solutions. The documentation displays in responsive HTML5 format so that you can easily access and view installation, configuration, or administration content from any online device.
- The HP Community provides additional tips and solutions from other HP product users.
- The Poly Partner Network is a program where resellers, distributors, solutions providers, and unified communications providers deliver high-value business solutions that meet critical customer needs, making it easy for you to communicate face-to-face using the applications and devices you use every day.
- Poly Services help your business succeed and get the most out of your investment through the benefits of collaboration. Enhance collaboration for your employees by accessing Poly service solutions, including Support Services, Managed Services, Professional Services, and Training Services.
- With Poly+ you get exclusive premium features, insights and management tools necessary to keep employee devices up, running, and ready for action.
- Poly Lens enables better collaboration for every user in every workspace. It is designed to spotlight the health and efficiency of your spaces and devices by providing actionable insights and simplifying device management. You can also download current software for your products directly from the Poly Lens portal.

2 Privacy-Related Options

The following topics cover the privacy-related options for Poly Studio G62, Poly G7500, and Poly Studio X systems.

Call Detail Report (CDR)

When enabled, the Call Detail Report (CDR) feature keeps a record of every incoming, outgoing, and missed call that occurs on the system. If a call does not connect, the report shows the reason. In multipoint calls, each far site is shown as a separate call, but all have the same conference number.

You can find the CDR in the system logs.

Enable the Call Detail Report Feature

Enable the Call Detail Report feature to keep a record of the system's most recent call entries. When enabled, you can download call records and view the room system's call history. Within five minutes after ending a call, the CDR is written to memory.

1. In the system web interface, go to **Call Configuration** > **Recenter Calls**.
2. Enable the **Call Detail Report** check box.

Configure the Recent Calls List

You can display recent calls on the **Place a Call** page in the system web interface.

The recent calls list includes the following information:

- Name or number
- If the system placed or received the call
- Date and time

1. In the system web interface, go to **Call Configuration** > **Recent Calls**.
2. Configure the following settings (your changes save automatically):

Setting	Description
Call Detail Report	Call detail record (CDR) information is in the system logs. When disabled, the system doesn't write call information.
Enable Recent Calls	Specifies whether to show recent calls on the local interface and the system web interface.
Maximum Number to Display	The maximum number of calls the system displays in the recent calls list.

Create Local Administrator Credentials

You can require local administrator credentials for in-room and remote access to the system.

Passwords for logging in to the system are case sensitive and can't contain more than 40 characters.

1. In the system web interface, go to **Security** > **Local Accounts**.
2. Configure the following settings:

Setting	Description
Admin ID	The local administrator account name (default is `admin`).

Setting	Description
Room Password	You must enter this password to change administrator settings in the local interface. The default password is the last six characters of the serial number listed in **System Details** and on the back of the device.
Remote Access Password	If you set this option, you must enter this password to access the system through the system web interface or command-line API (SSH or telnet). This password lets you perform device management tasks, such as updating the system's software.

3. **Optional:** Do one of the following:

   - To use the local administrator **Room Password** for remote logins, leave the **Use Room Password for Remote Access** option enabled.

   NOTE: Password requirements for the local administrator password and remote access password must be configured separately.

   - If you don't want to use the local administrator **Room Password** for remote logins, disable the **Use Room Password for Remote Access** option.

   This setting specifies that the system uses the local administrator **Room Password** for remote logins. This setting is enabled by default.

4. Select **Save**.

Setting Up a Directory

You can register your system with a directory to call contacts in your organization

The system supports the following directory features:

- Up to 2,000 local contacts
- Up to 2,000 Favorites
- Up to 200 Favorites groups
- Global groups (local groups aren't supported)
- Up to 4,000 contacts from a Polycom GDS server

Register with the Polycom Global Directory Server

You can register your system with the Polycom Global Directory Server (GDS).

Enable H.323 on your system before you register it with this directory server.

1. In the system web interface, go to **Servers** > **Directory Servers**.
2. In the **Server Type** field, select **Polycom GDS**.
3. Configure the following settings:

Setting	Description
Server Address	Specifies the IP or DNS address of the Polycom GDS.
Password	The Polycom GDS password, if one exists.

4. Select **Save**.

Register with an LDAP Directory Server

You can register your system with an LDAP directory server.

1. In the system web interface, go to **Servers** > **Directory Servers**.
2. In the **Server Type** field, select **LDAP**.
3. Configure the following settings:

Setting	Description
Server Address	Specifies the address of the LDAP directory server. When provisioned, this setting is read-only.
Server Port	Specifies the port for connecting with the LDAP server. When provisioned, this setting is read-only.
Base DN (Distinguished Name)	Specifies the top level of the LDAP directory where searches begin. When provisioned, this setting is read-only. To avoid LDAP registration issues, make sure the base DN is at least one level deeper than your domain. For example, enter `ou=users,dc=example,dc=com` instead of `dc=example,dc=com`.

Setting	Description
Multitiered Directory Default Group DN	Specifies the top-level group of the LDAP directory required to access its hierarchical structure. When provisioned, this setting is read-only.
Authentication Type	Specifies the protocol for authenticating with the LDAP server: • **NTLM** • **Basic** • **Anonymous**
Bind DN (Distinguished Name)	Specifies the bind DN when using basic authentication. Available only when you set **Authentication Type** to **Basic**. When provisioned, this setting is read-only.
Use SSL (Secure Socket Layer)	When enabled, encrypts data to and from the LDAP server.
Domain Name	Specifies the domain name for registering with the LDAP server.
User Name	Specifies the user name for registering with LDAP server.
Password	Specifies the password for registering with the LDAP server.

4. Select **Save**.

Managing Contacts and Favorites

You can create local contacts and designate favorites for your system.

Types of

The system web interface displays several types of favorites.

Directory Server Registration	Types of Contacts
	• Directory entries created locally by the user. • References to Polycom GDS entries added to **Favorites** by the user. These entries are available only if you successfully register the system with Polycom GDS. Users can delete these entries from **Favorites**, but they can't edit these entries. Users can copy these entries to other **Favorites** and remove them from those groups.
LDAP with H.350	• Directory entries created locally by the user. • References to LDAP directory entries added to **Favorites** by the user. These entries are available only if the system can successfully access the LDAP server. Users can delete these entries from **Favorites**, but they can't edit these entries. Users can copy these entries to other **Favorites** and remove them from those groups.

Manage Contacts

You can add contacts individually or in bulk in the system web interface.

1. Do one of the following:
   - Go to **Dashboard** > **Contacts**.
   - Go to **Place a Call** > **Contacts**.
2. Select **More** and choose one of the following options:
   - **New Contact**: Create a single contact.
   - **Import**: Upload contacts in bulk using an XML file (can't exceed 3 MB).
   - **Export**: Download local contacts to an XML file (doesn't include contacts available through a directory server).

Unfavorite a contact

Unfavorite a contact to remove the contact from your **Favorites** list.

1. Go to **Place a Call** > **Favorites**.
2. Choose a favorite card, then select **Unfavorite**.

   The contact is removed from the **Favorites** list.

Register the System with Poly Clariti Manager Provisioning Service

Before you can provision a system, you must register it with a provisioning service.

NOTE: Make sure to configure your provisioning server (for example, Poly Clariti Manager) ahead of time so that it recognizes and works with your endpoint.

For information on device support for Clariti Manager, see the products release notes.

For information on how to provision your system with Poly Clariti Manager, see the Poly Clariti Manager Administrator Guide.

1. In the system web interface, go to **Servers** > **Provisioning Server**.
2. Select **Enable Provisioning**.
3. Select **Load Discovered Information**.

   The registration fields update automatically if your system detects a provisioning server.

4. **Optional:** If your system didn't detect a provisioning server, complete the following fields (contact your network administrator for help):

Setting	Description
Authentication Type	The type of authentication the system uses to connect to the provisioning server.
Server Address	Address of the system running the provisioning service. The format is `https://<server>/ucservice` . For example, `https://video.myrpp.poly.com/ucservice` .
Domain Name	Domain for registering with the provisioning service. This option doesn't display if you select **Basic** as the authentication type.
User Name	User ID for registering with the provisioning service.
Password	Password for registering with the provisioning service.

5. Select **Save**.
6. Verify that **Registration Status** changes from **Pending** to **Registered**.

   It might take a minute or two for the status to change.

Retrieve Log Files

You can use the web interface to download log files to a location on your computer

Wake the system before retrieving log files.

NOTE: The date and time of the system log entries for Poly Studio V systems are shown in GMT.

1. Access the web interface by opening a web browser and entering the IP address of the Poly Studio V system using the format https://IPaddress (for example, https://10.11.12.13), and go to **Diagnostics > Logs**.
2. Select **Download system logs**. A dialog window opens for you to specify how you want to open or save the .tgz file.

3 Purposes of Processing Personal Data

For these details, see the Security and Privacy White Paper for Poly G7500 and Poly Studio G/X Family.

4 How Administrators Are Informed of Any Security Anomalies (Including Data Breaches)

Table 4-1 How Administrators are Informed of Any Security Anomalies

Security Anomaly Type	Where to Check	Recommended Frequency to Check
All active alerts	An administrator can configure alerts and monitor using the local interface, system web interface, SNMP monitoring, or Polycom RealPresence Resource Manager (if configured).	Once daily

5 How Personal Data is Deleted

Table 5-1 How Customer Personal Data is Deleted

Data Type	Steps to Delete	Deletion Method
Call detail record (CDR)	• By default, CDRs are overwritten by new CDRs periodically via rolling logs configurable by device administrator. • CDRs can also be deleted by performing a standard or comprehensive restore operation. • Factory restore the system.	File delete with overwrite.
Directory/Contacts	• See the "Setting Up a Directory" section in the Poly Video Mode Administrator Guide. • The contacts can also be deleted by resetting the system.	Delete from database.
System log files	• Log files are automatically deleted by the system (oldest first) when the system reaches the file limit. These settings can be configured by the device administrator from**Diagnostics** > **Logs** > **Log Management**. • Log files are also deleted by resetting the system.	File delete with overwrite.
All other personal data stored locally on the system.	Factory restore the system.	File delete with overwrite.

For details about how personal data is deleted on Polycom RealPresence Resource Manager, see the User Data Collection section of the Polycom RealPresence Resource Manager Operations Guide.

Reset System Settings

You can reset your Poly G7500, Poly Studio G62, and Poly Studio X series system to its default configuration settings.

You may need to perform a system reset for a variety of reasons, for example, when moving a device to a new location.

Resetting your system deletes all but the following data:

- Current software version
- User-installed PKI certificates
- Local directory entries
- Logs
- Call detail record (CDR)

You also can choose not to retain some of this data after the system resets.

NOTE: A system reset restores your system to its original mode of operation. For example, Poly Video Mode or Poly Partner Mode.

1. In the system web interface, go to **Diagnostics** > **System Reset**.
2. Select **Reset All System Configurations**.
3. **Optional:** Clear any of the following check boxes for data you want to delete as part of the reset:
   - **Keep installed certificates.**
   - **Keep the directory entries.**
   - **Keep the system logs.**
   - **Keep the system call detail reports.**
4. Select **Reset**.

Factory Restore the System

A factory restore completely erases the system's flash memory and restores it to a stable software version. See the *Poly VideoOS Release Notes*, Version History section, for the current factory restore version.


The system doesn't save the following data with a factory restore:

- Current software version
- Logs
- User-installed PKI certificates
- Local directory entries
- Call detail record (CDR)


1. Disconnect the power supply to turn off the system.

2. Do one of the following:


- On the back of the Poly Studio G62, insert a straightened paper clip through the factory restore pinhole.

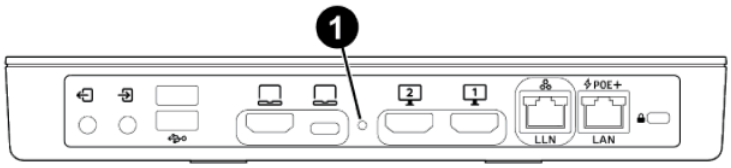


- On the front of the Poly G7500, insert a straightened paper clip through the factory restore pinhole.

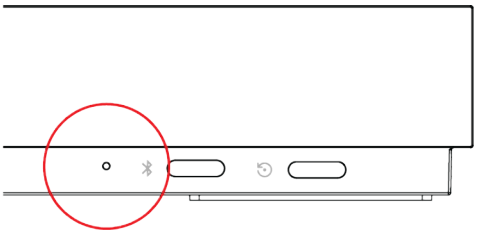


- On the bottom of the Poly Studio X72 or Poly Studio X70, insert a straightened paper clip through the factory restore pinhole.

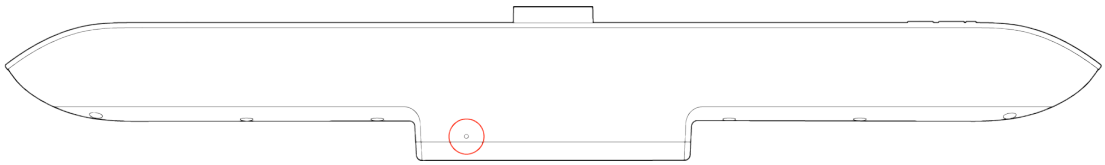


- On the side of the Poly Studio X52, insert a straightened paper clip through the factory restore pinhole.

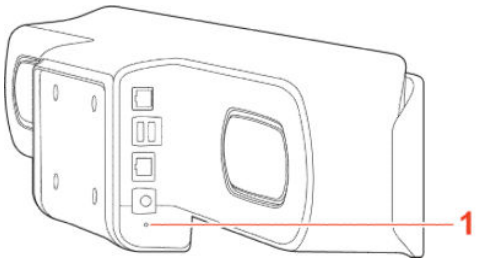


- On the side of the Poly Studio X50, insert a straightened paper clip through the factory restore pinhole.

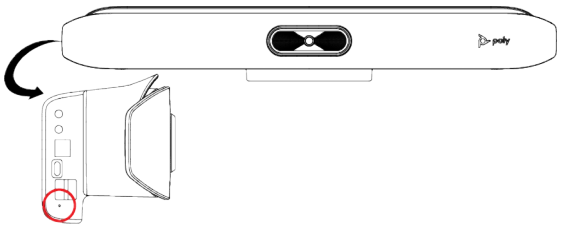

- On the bottom of the Poly Studio X32, insert a straightened paper clip through the factory restore pinhole.

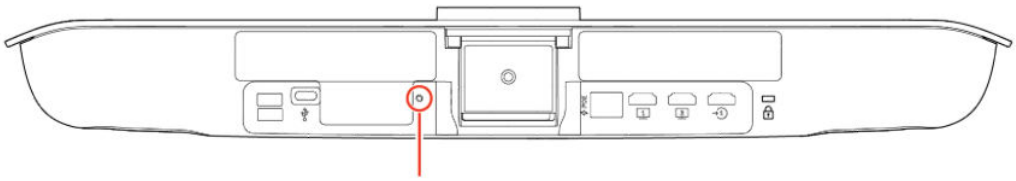

- On the bottom of the Poly Studio X30, insert a straightened paper clip through the factory restore pinhole.

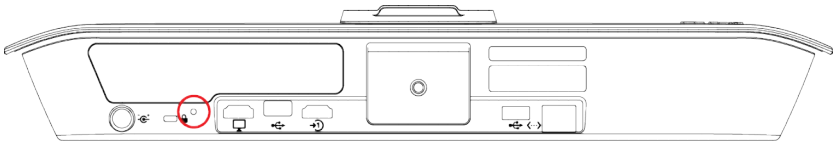

3. While continuing to hold the restore button, reconnect the power supply to turn the system on.
4. When the system LED indicator light turns amber, stop pressing the restore button.

   You can only view the restore progress on a display connected to the secondary monitor HDMI output port.

NOTE: You can’t view the restore progress for a Poly Studio X30 system because it doesn't support a secondary monitor connection.

6 Getting help

Poly is now a part of HP. The joining of Poly and HP paves the way for us to create the hybrid work experiences of the future. Information about Poly products has transitioned from the Poly Support site to the HP Support site.

The Poly Documentation Library is continuing to host the installation, configuration/administration, and user guides for Poly products in HTML and PDF format. In addition, the Poly Documentation Library provides Poly customers with information about the transition of Poly content from Poly Support to HP Support.

The HP Community provides additional tips and solutions from other HP product users.

The Worldwide HP Privacy Statement describes how HP collects, uses, discloses, and otherwise, processes your personal data.

HP Inc. addresses

Contact HP at the following office locations.

HP US
HP Inc.
1501 Page Mill Road
Palo Alto, CA 94304
United States
Phone:+ 1 650-857-1501

HP Germany
HP Deutschland GmbH
HP HQ-TRE
71025 Boeblingen, Germany

HP Spain
HP Printing and Computing Solutions, S.L.U.
Cami de Can Graells 1-21 (Bldg BCN01)
Sant Cugat del Valles
Spain, 08174
902 02 70 20

HP UK
HP Inc UK Ltd
Regulatory Enquiries, Earley West
300 Thames Valley Park Drive
Reading, RG6 1PT
United Kingdom

Document information

Review the following document information.

Model ID: Poly Studio G62 (PBJ-STG-62R / PBJ-STG-62N), Poly G7500 (model: P011), Poly Studio X72 (model: PATX-STX-72R / PATX-STX-72N), Poly Studio X70 (model: P026), Poly Studio X52 (model: P033), Poly Studio X50 (model: P017), Poly Studio X32 (model: PATX-STX-32R / PATX-STX-32N), Poly Studio X30 (model: P018)

Document part number: P43445-001A

Last update: March 2025

Email us at documentation.feedback@hp.com with queries or suggestions related to this document.